GTS NX功能介紹

2025/03/06 10:00~11:00

Google會議室 https://meet.google.com/sgo-hhbz-qiy

Contents

- Why MIDAS Geotech works for engineers
- What to do with GTS NX
- How to enhance the design process
- Case Study
- Fully integrated approach

Why do the engineers suffer?

GTS NX will make your time efficient

Reasons for 3D

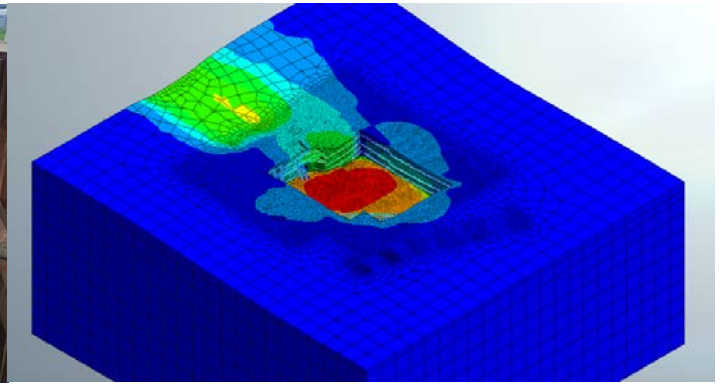

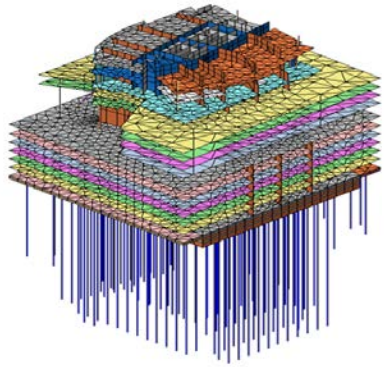

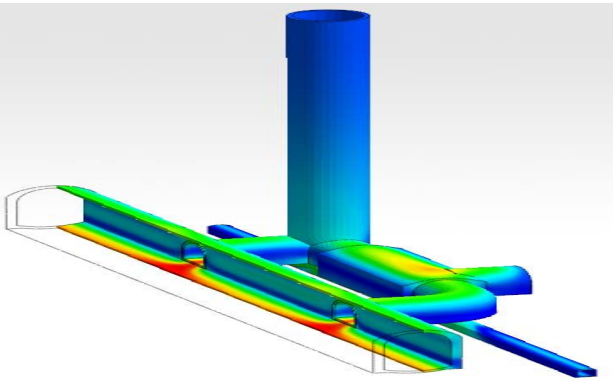

People in MIDAS Geotech

- Experts in 3D/2D geotechnical engineering
- Various experience with technical support and training

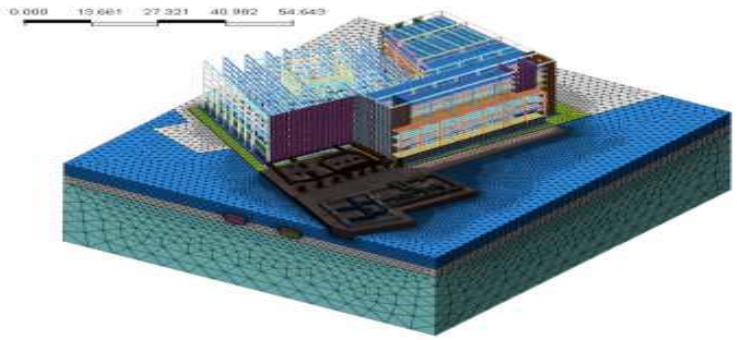

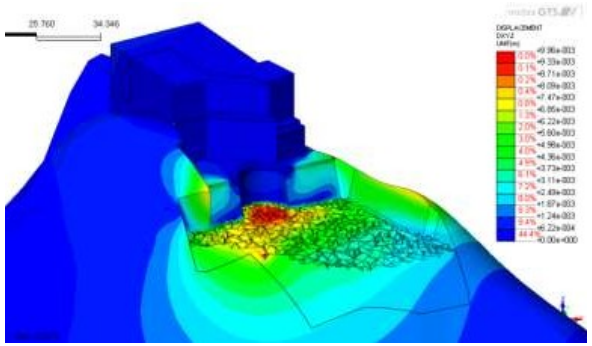

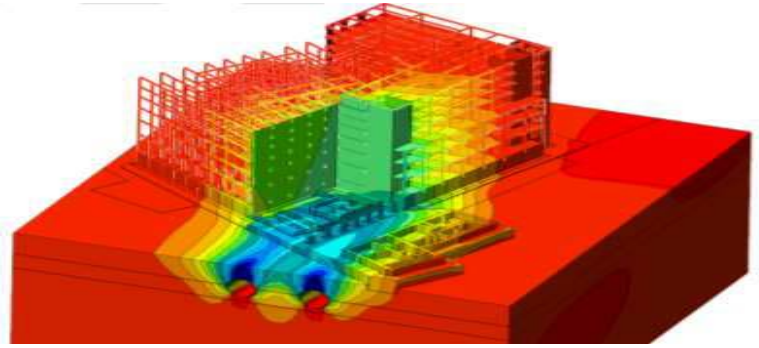

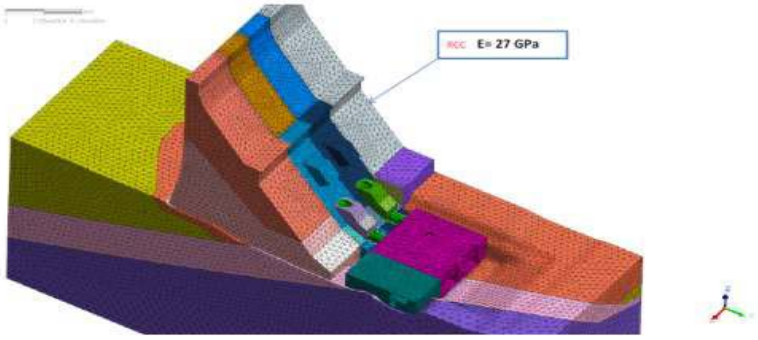

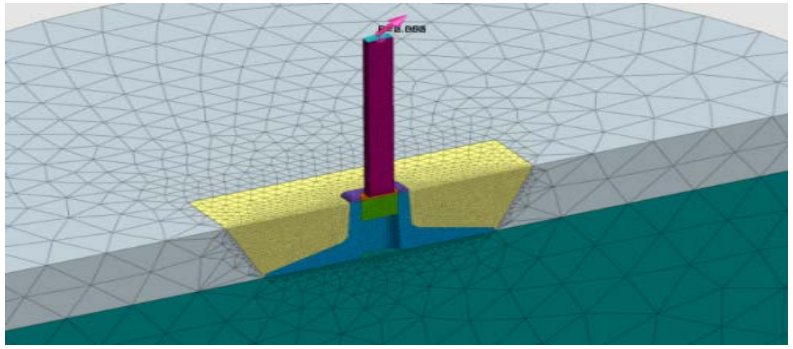

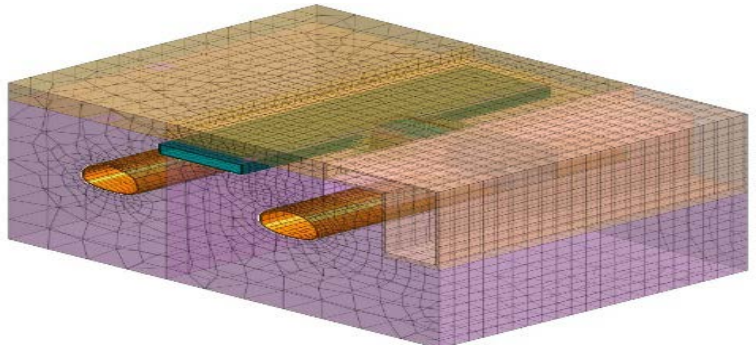

What to do w/ GTS NX

Pile

Excavation

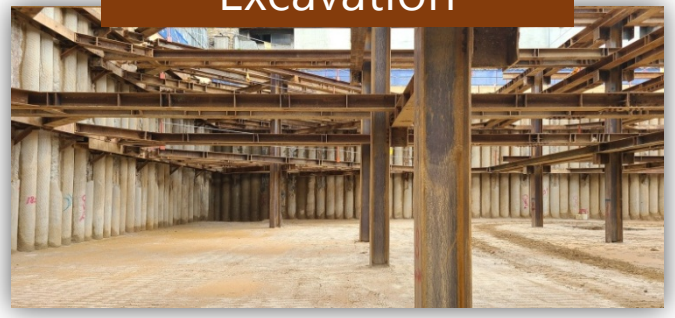

Tunnel

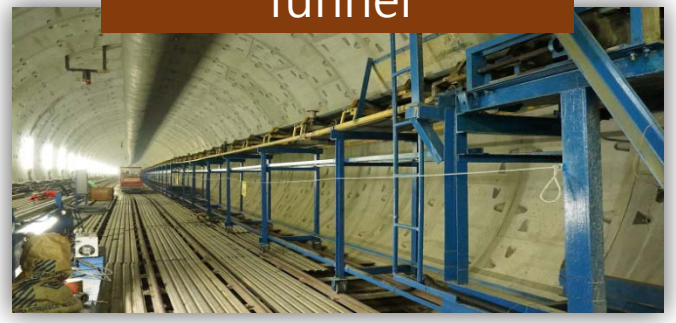

Slope Stability

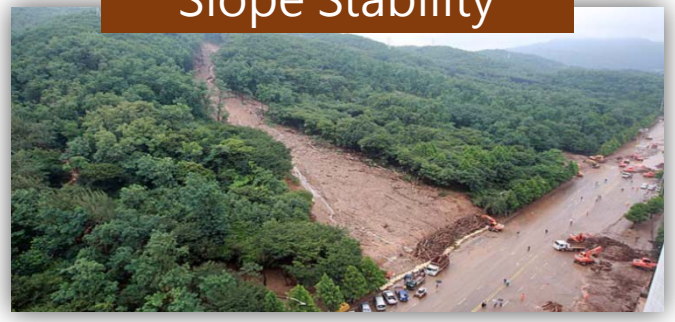

Dam

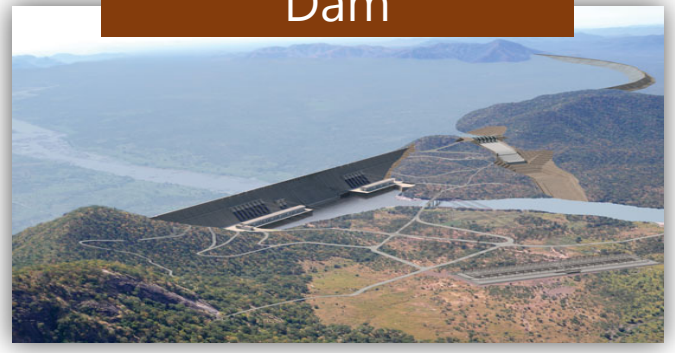

Dynamics

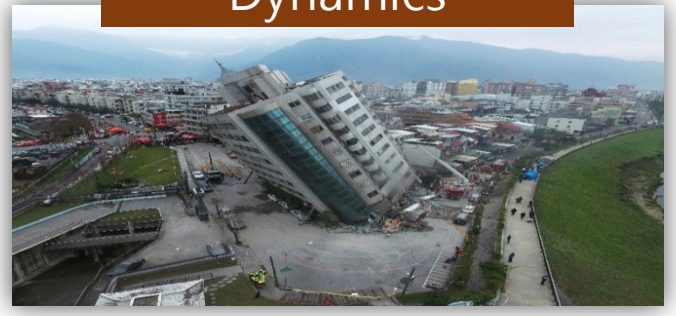

Perform all kinds of analyses with GTS NX in One platform

- Linear static analysis
- Nonlinear static analysis

Static Analysis

- Stress (drained/undrained) analysis
- Seepage analysis for each stage
- Stress-seepage-slope coupled
- Consolidation analysis for each stage
- Fully coupled stress & seepage

Construction Stage Analysis

- Consolidation analysis
- Stress–seepage fully coupled analysis

Consolidation Analysis

Stress-Seepage Fully Coupled

Seepage Analysis

- Steady state seepage analysis
- Transient seepage analysis

Dynamic Analysis

- Eigenvalue / Response Spectrum analysis
- Linear Time History (mode/direct methods)
- Nonlinear Time History analysis
- 1D/2D Equivalency Linear analysis
- Nonlinear time history + SRM Coupled

Slope Stability Analysis

- Strength Reduction Method (SRM)
- Strength Analysis Method (SAM)
- Construction stages Slope stability (SRM/SAM)

How to enhance your design process

- **Simple work-flow**

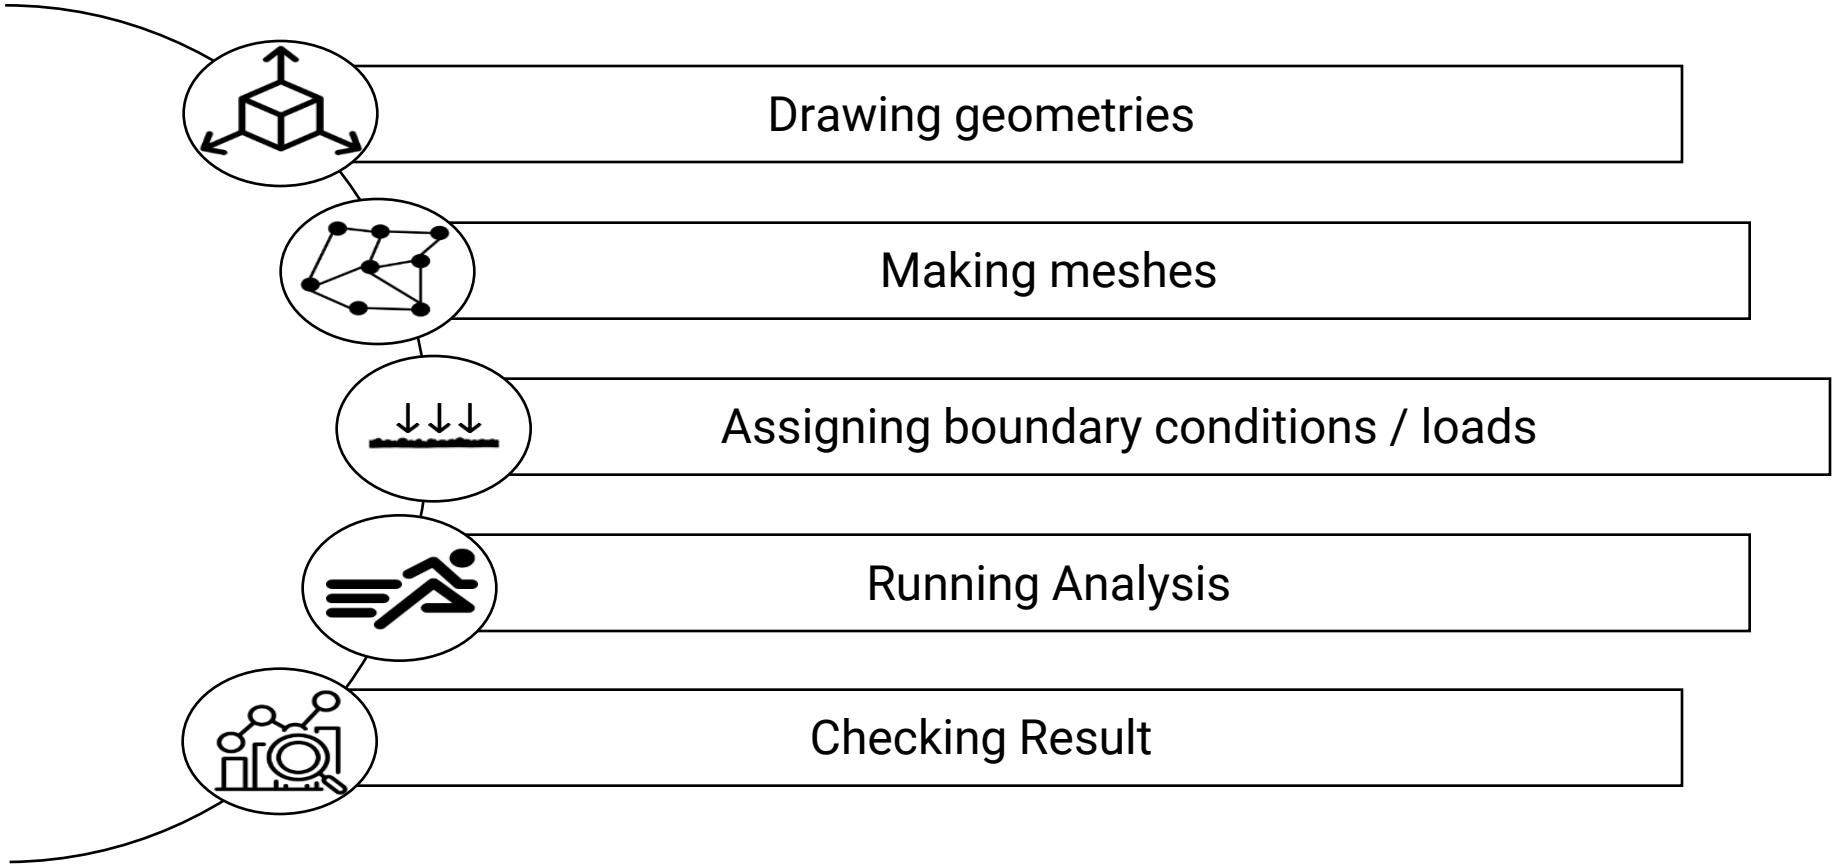

How to enhance your design process

- Simple work-flow

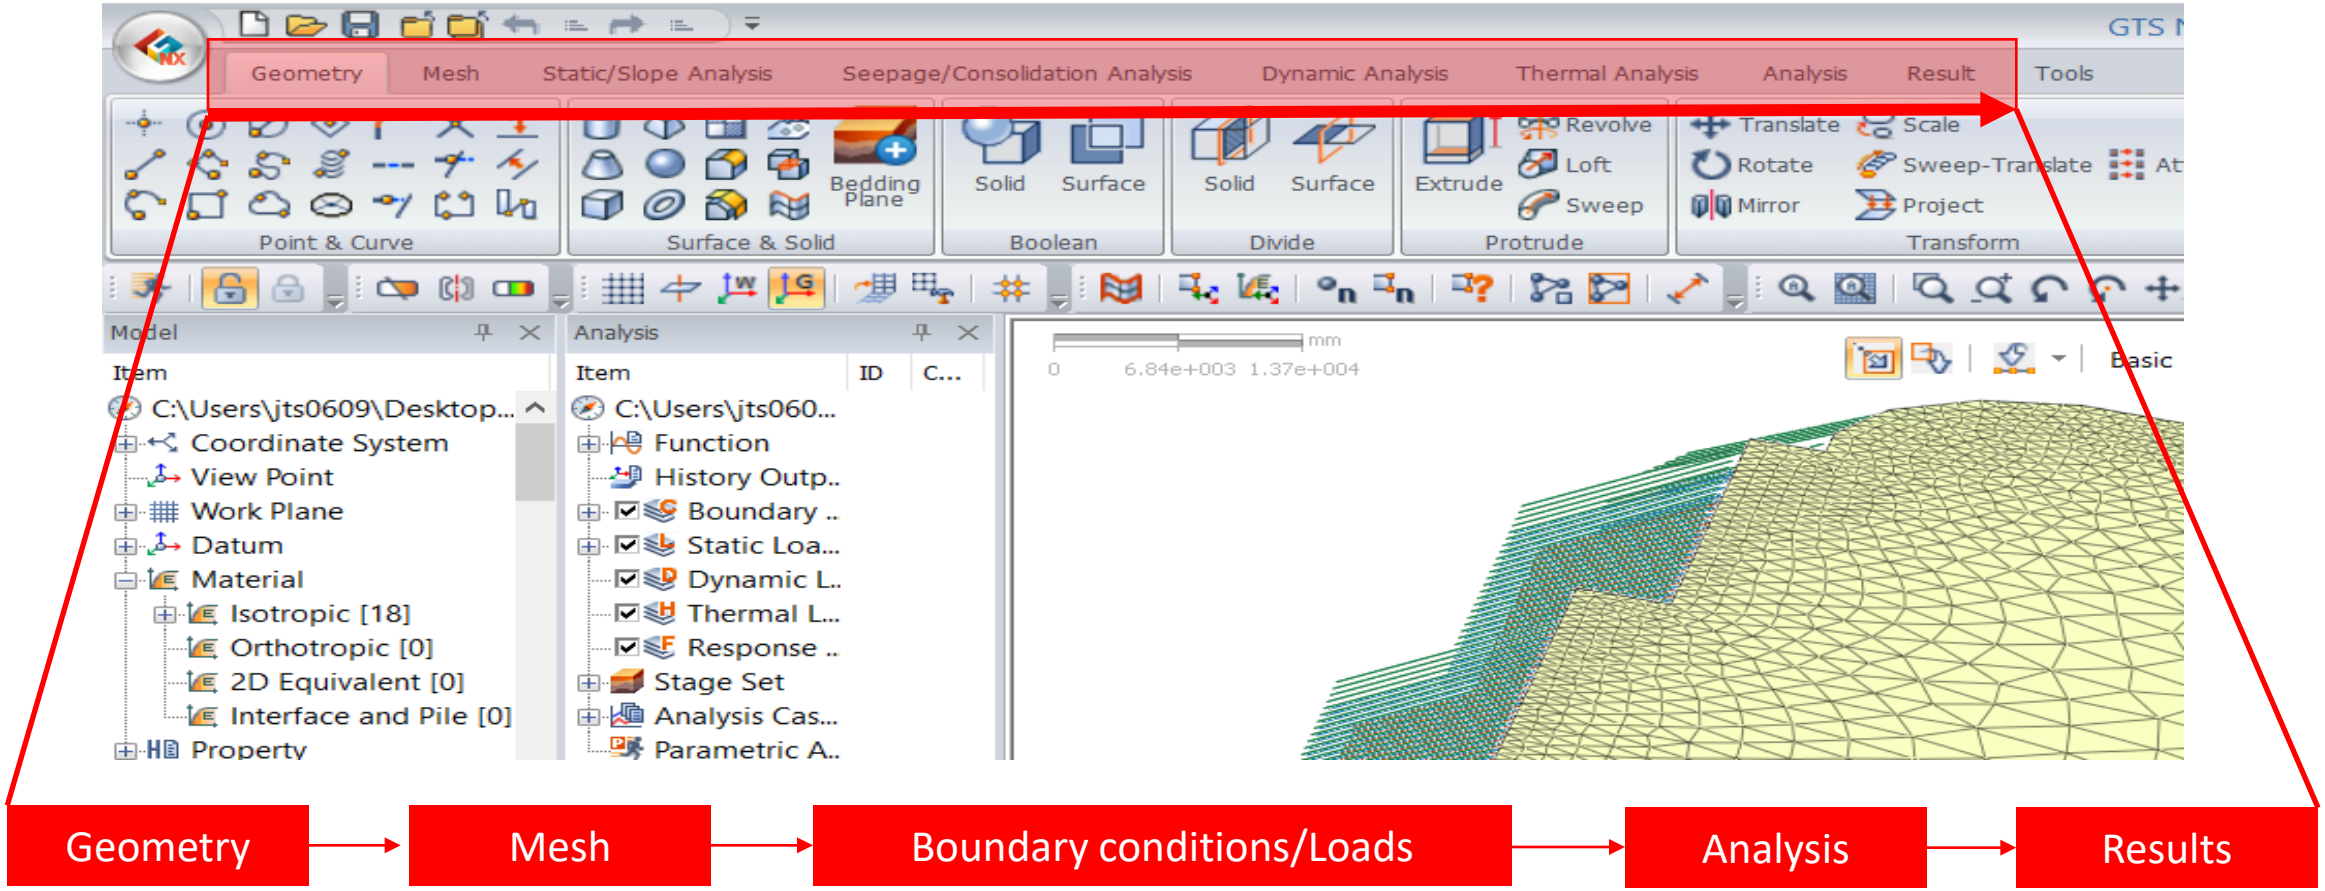

How to enhance your design process

- **Graphical User Interface**

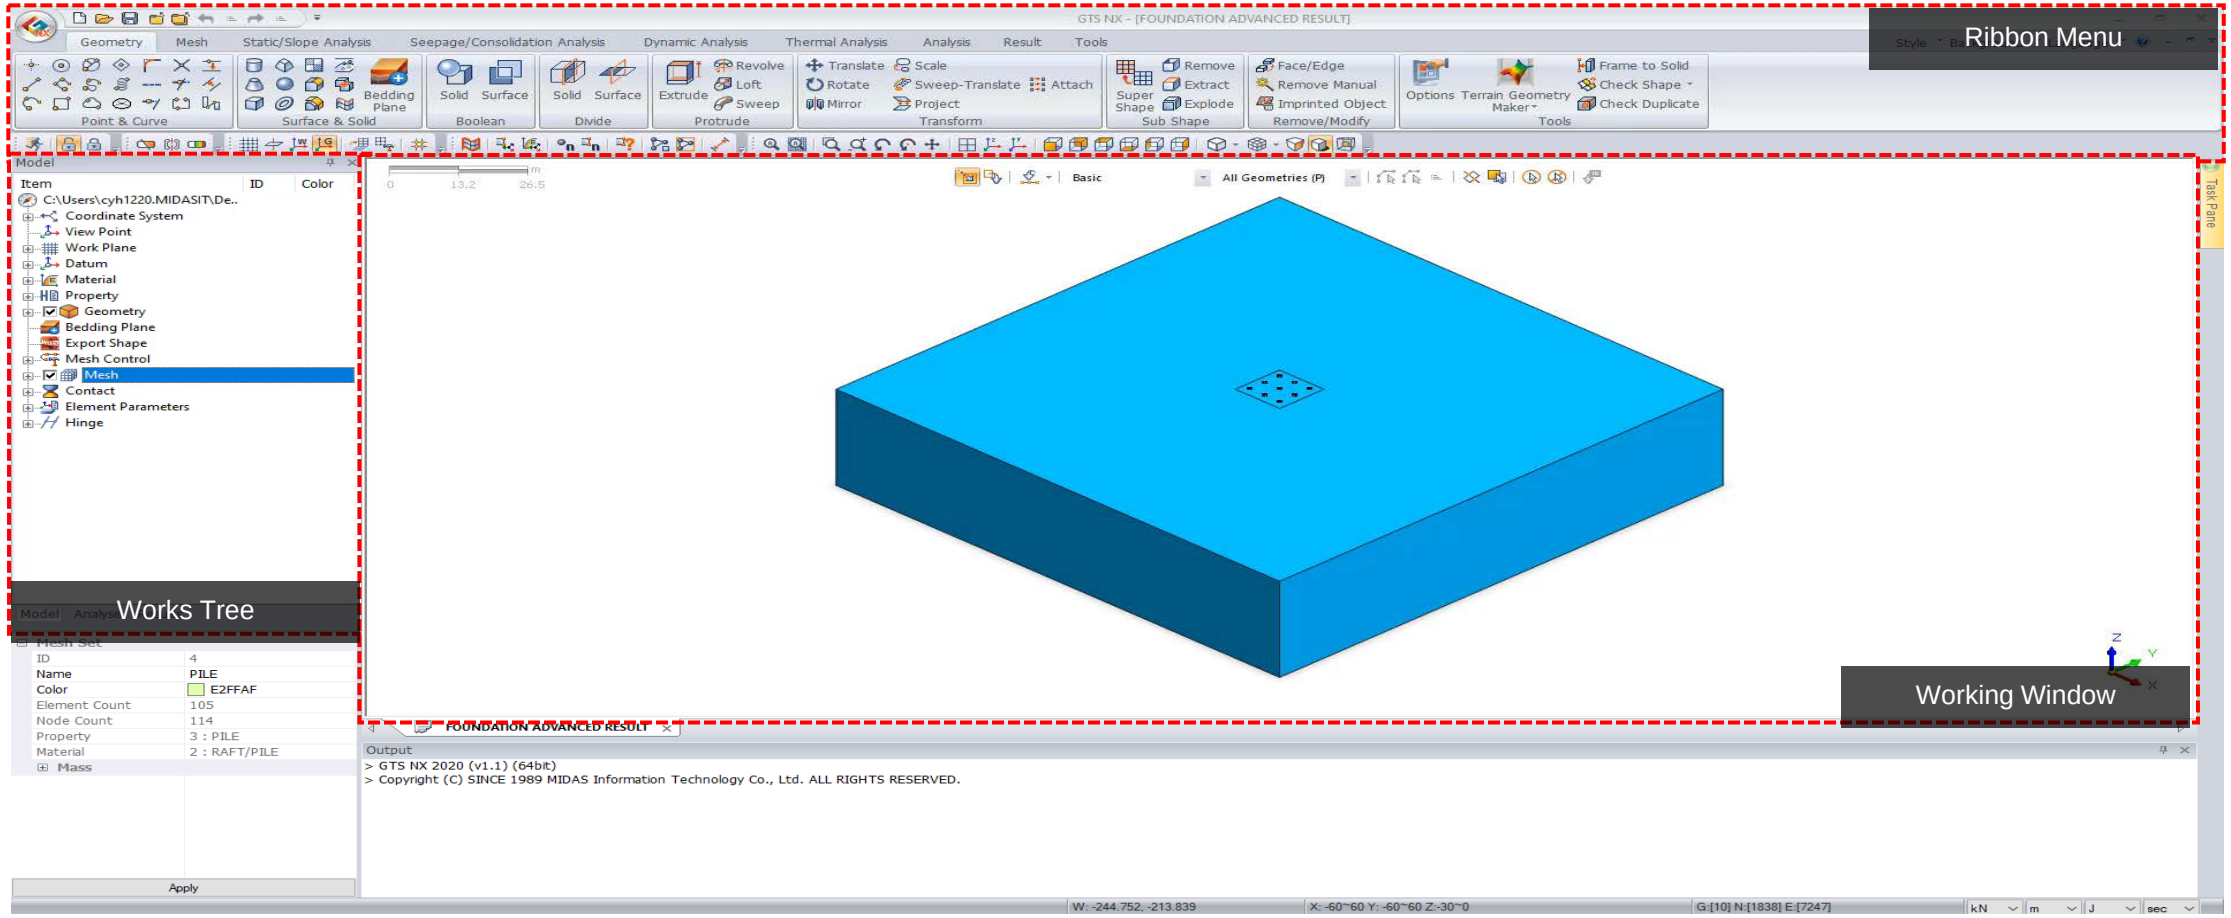

How to enhance your design process

- **Multi windows**

  Compare various sections or different approaches in one program window

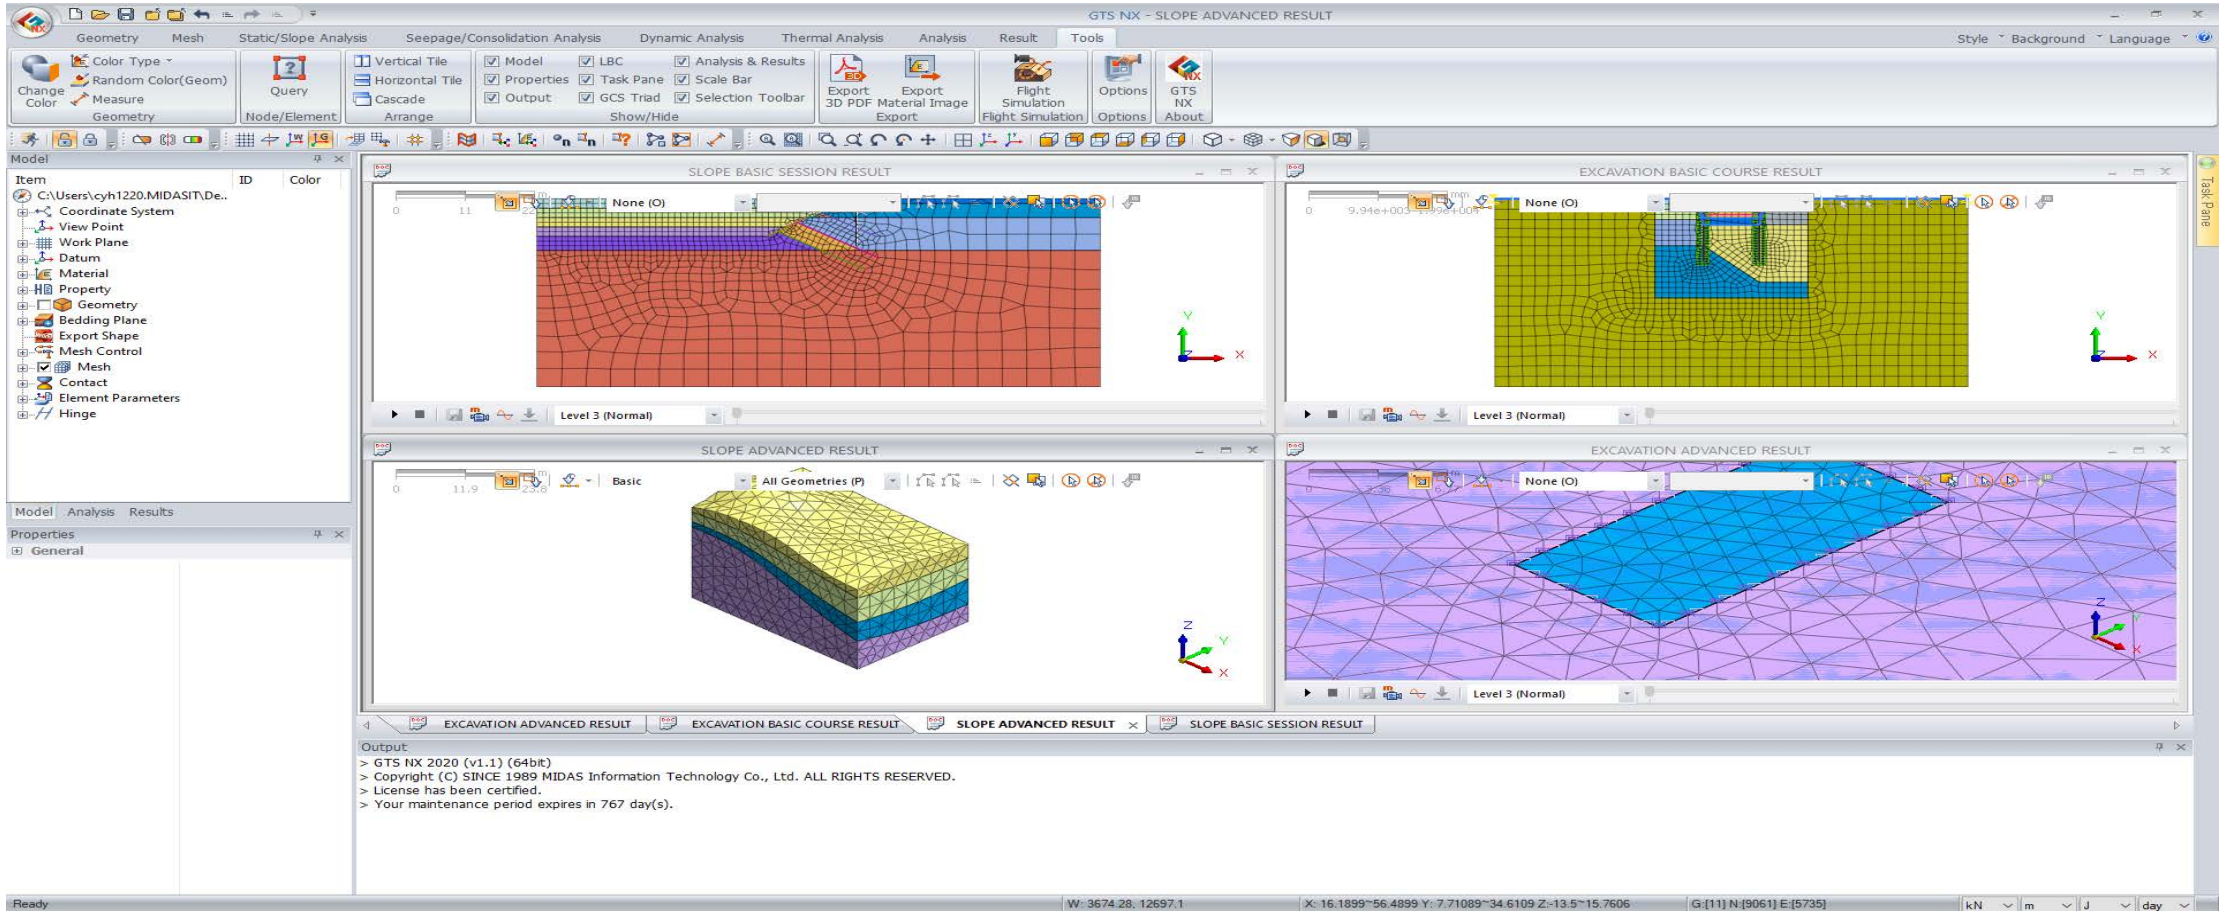

How to enhance your design process

- **Various constitutive soil model**
  Choose the appropriate soil model for your various projects

General	Mohr-Coulomb Hardening Soil (small strain stiffness)
Sand	Modified UBCSAND PM4Sand
Clay	**Soft soil (Creep)** Modified Cam Clay Sekiguchi-Ohta(Inviscid) Sekiguchi-Ohta(Viscid) Generalized SCLAY1S
Rock	**(Generalized) Hoek Brown** **Jointed Rock Mass** CWFS

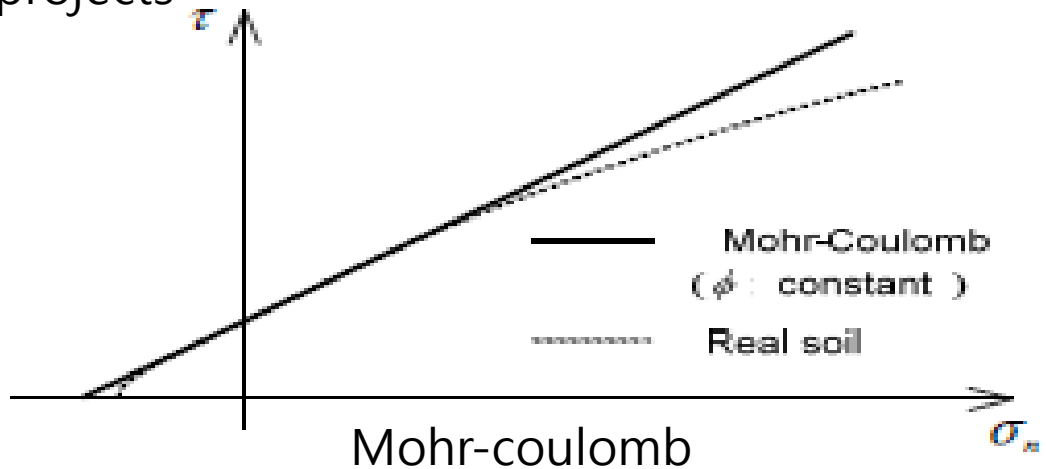

Mohr-coulomb

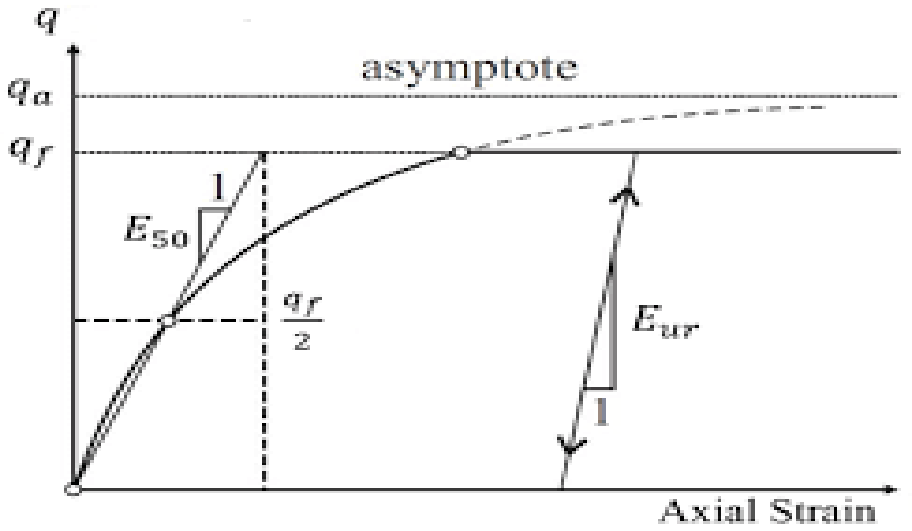

Hardening soil

How to enhance your design process

- **Various element library**

  Save time by just selecting the necessary elements from the prepared library

1D Element
Geogrid
Truss
Beam

2D Element
Shell
Gauging shell
Plane stress
Plane strain
Geogrid
Axisymmetric

3D Element
Solid

Others
Interface
Elastic / Rigid link
Pile interface / Pile tip
User specified behavior

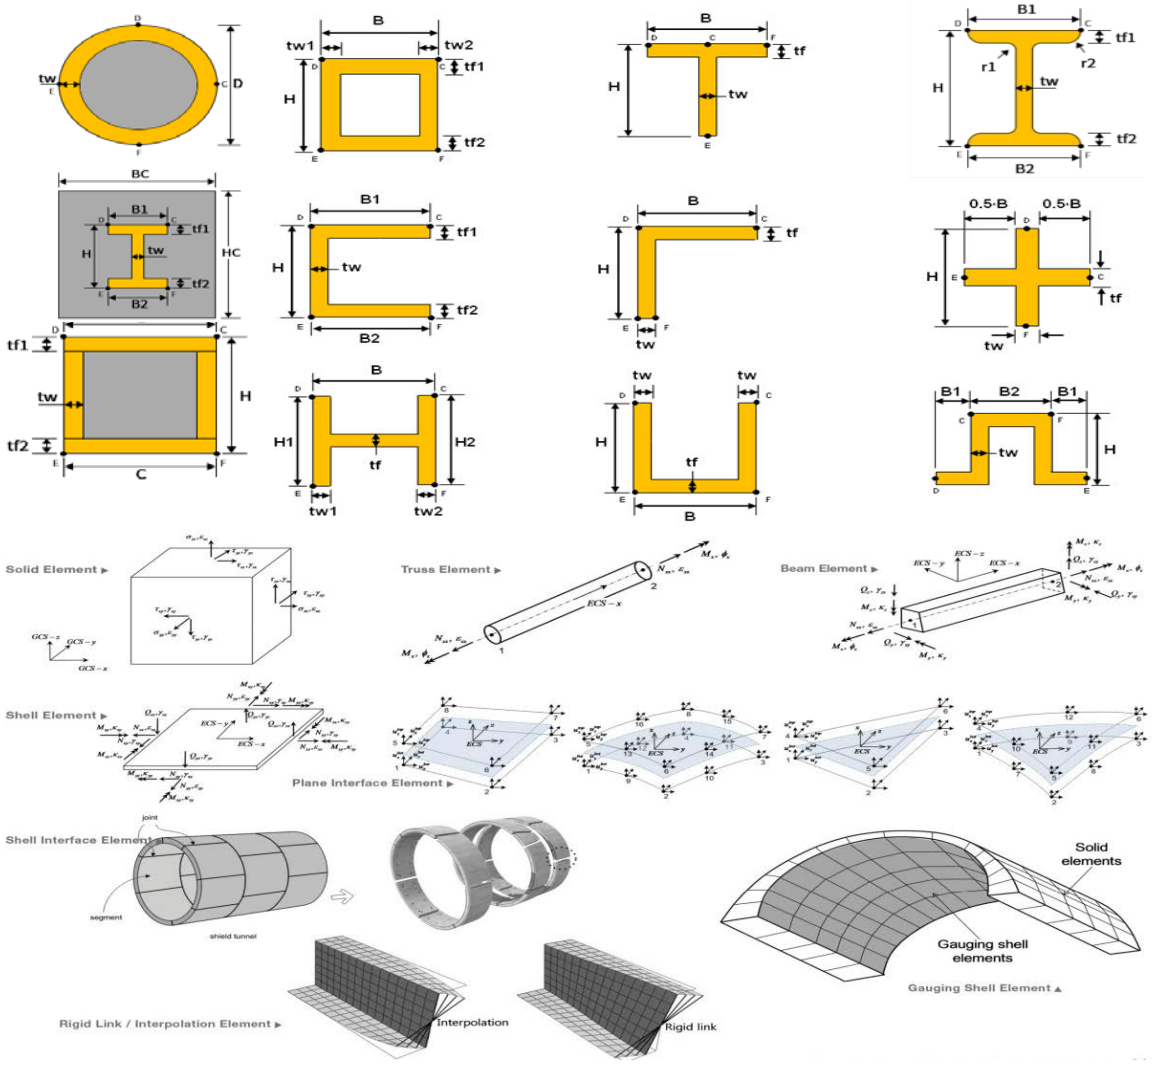

How to enhance your design process

- **More convenient Partial Factor design function**

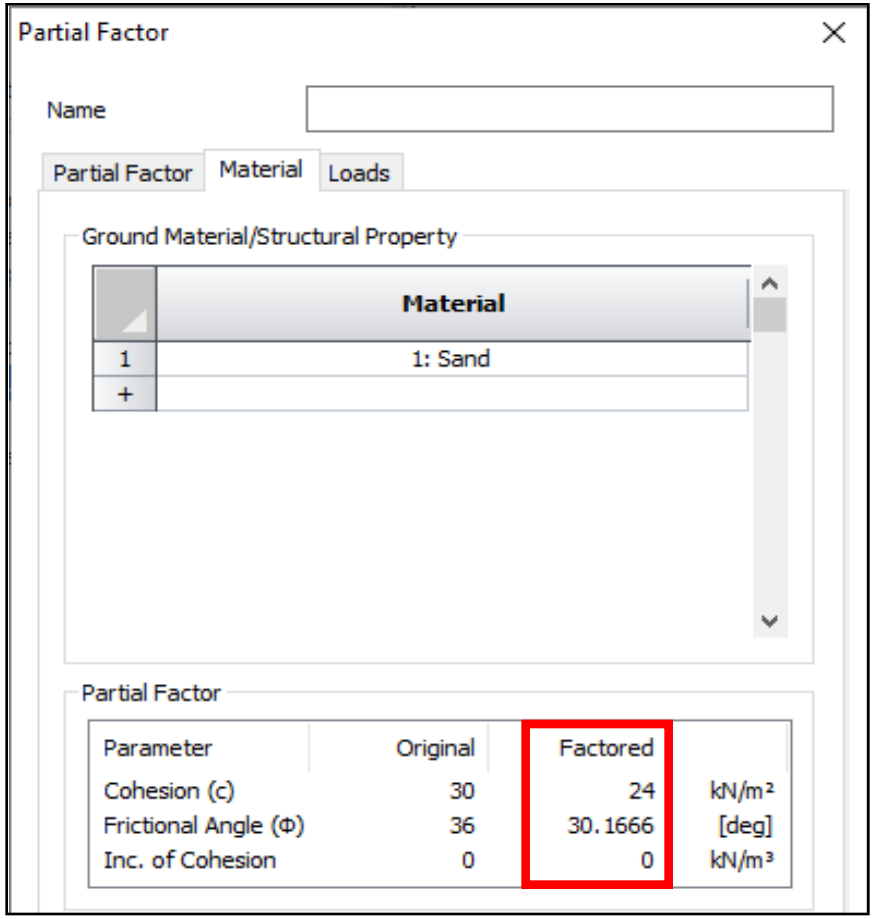

2D analysis can use the **partial factor** function
which was development based on Euro Code 7.

GTS NX is providing the database for this partial factor as below,
Design Approach 1 Combination 1
Design Approach 1 Combination 2
Design Approach 2
Design Approach 3

Directly checking the original and factored parameters

How to enhance your design process

- **Perfect compatibility with CAD formats**

File format	Description
*.dwg	AutoCAD drawing files
*.dxf	AutoCAD drawing interchange files
*.x_t; *.xmt_txt; *.x_b; *.xmt_bin	Parasolid (9 to 29) files
*.sat; *.sab; *.asat; *.asab	ACIS (R1 to 2018 1.0) files
*.stp; *.step	STEP (AP203, AP214) files
*.igs; *.iges	IGES (Up to 5.3) files

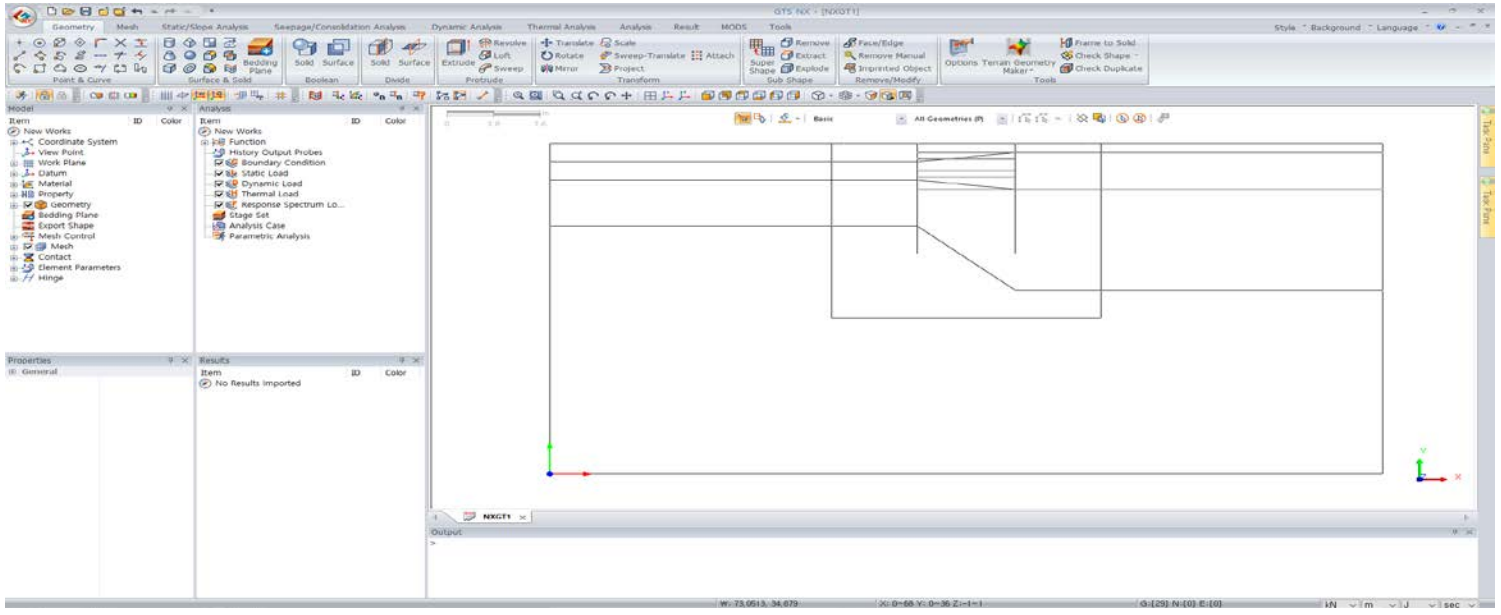

How to enhance your design process

- **Intuitive & Powerful geometry functions – extrude, sweep, boolean and etc.**

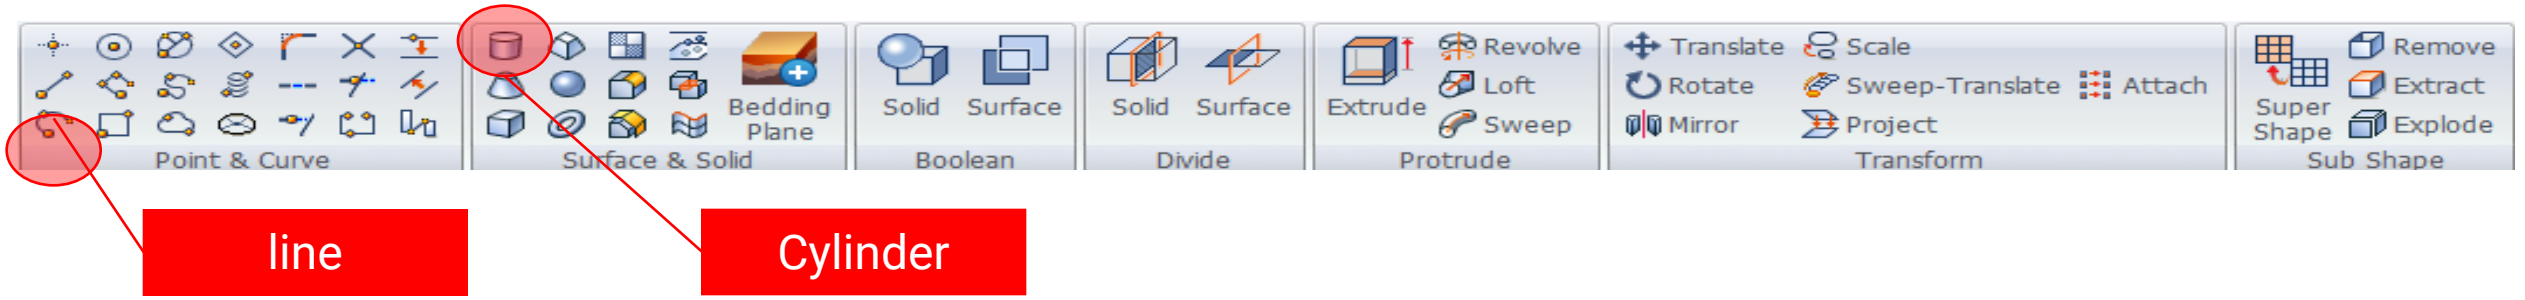

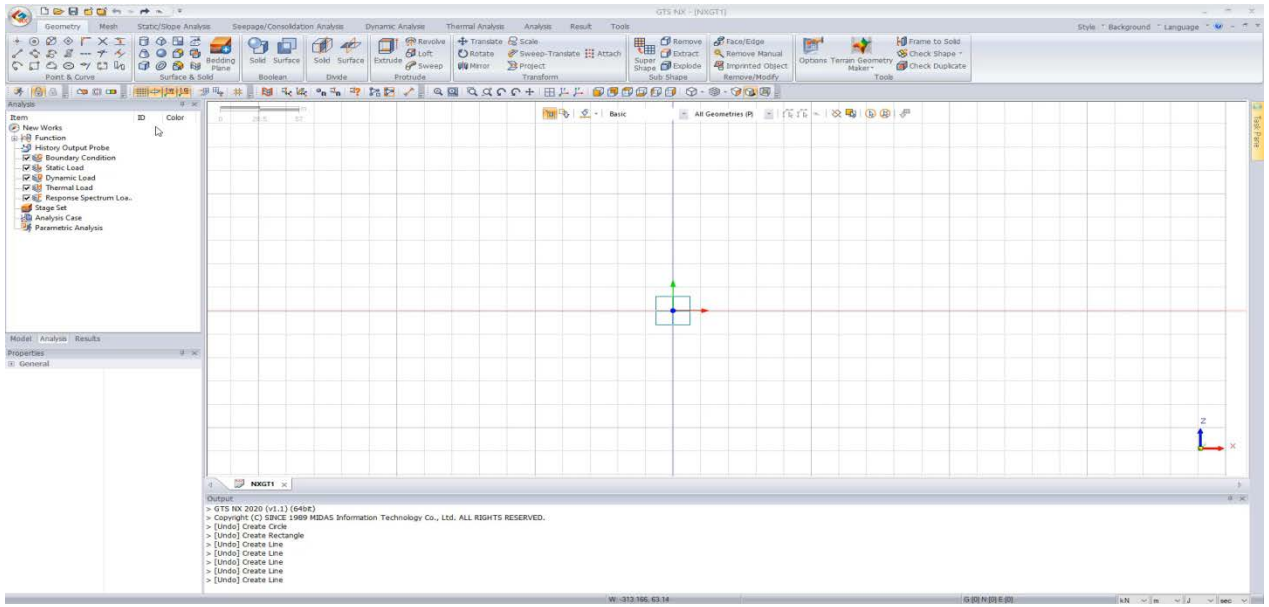

Line / Square / Circle

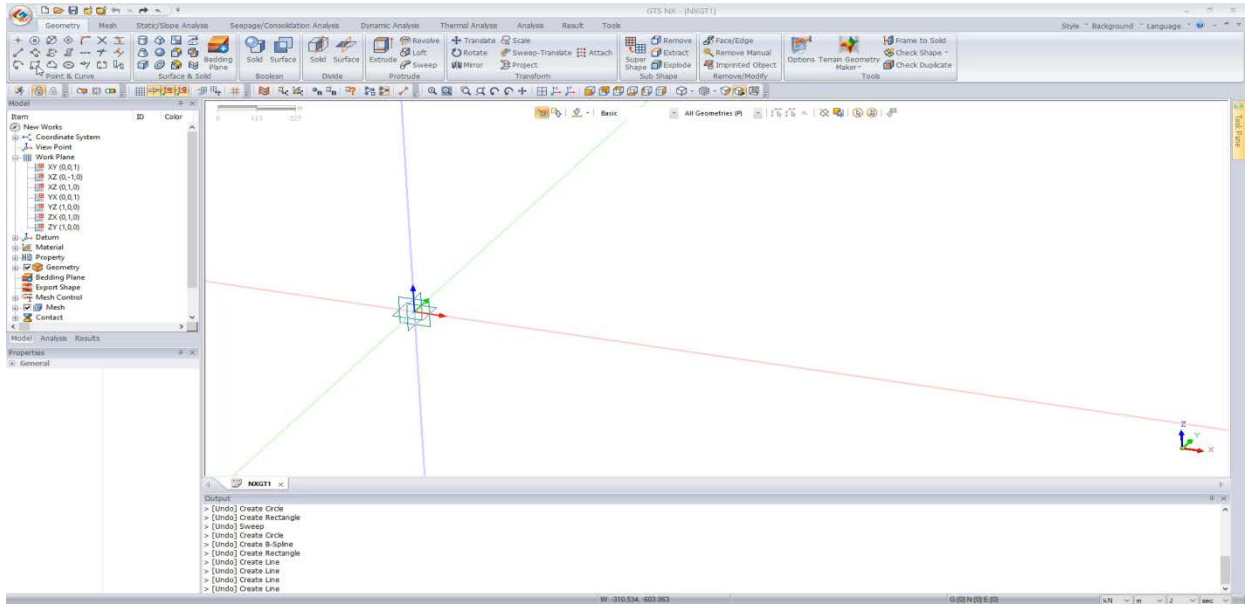

Extrude / Sweep

How to enhance your design process

- **TGM & Bedding plane wizard**

  Easily create the surface of the site by simple topography import

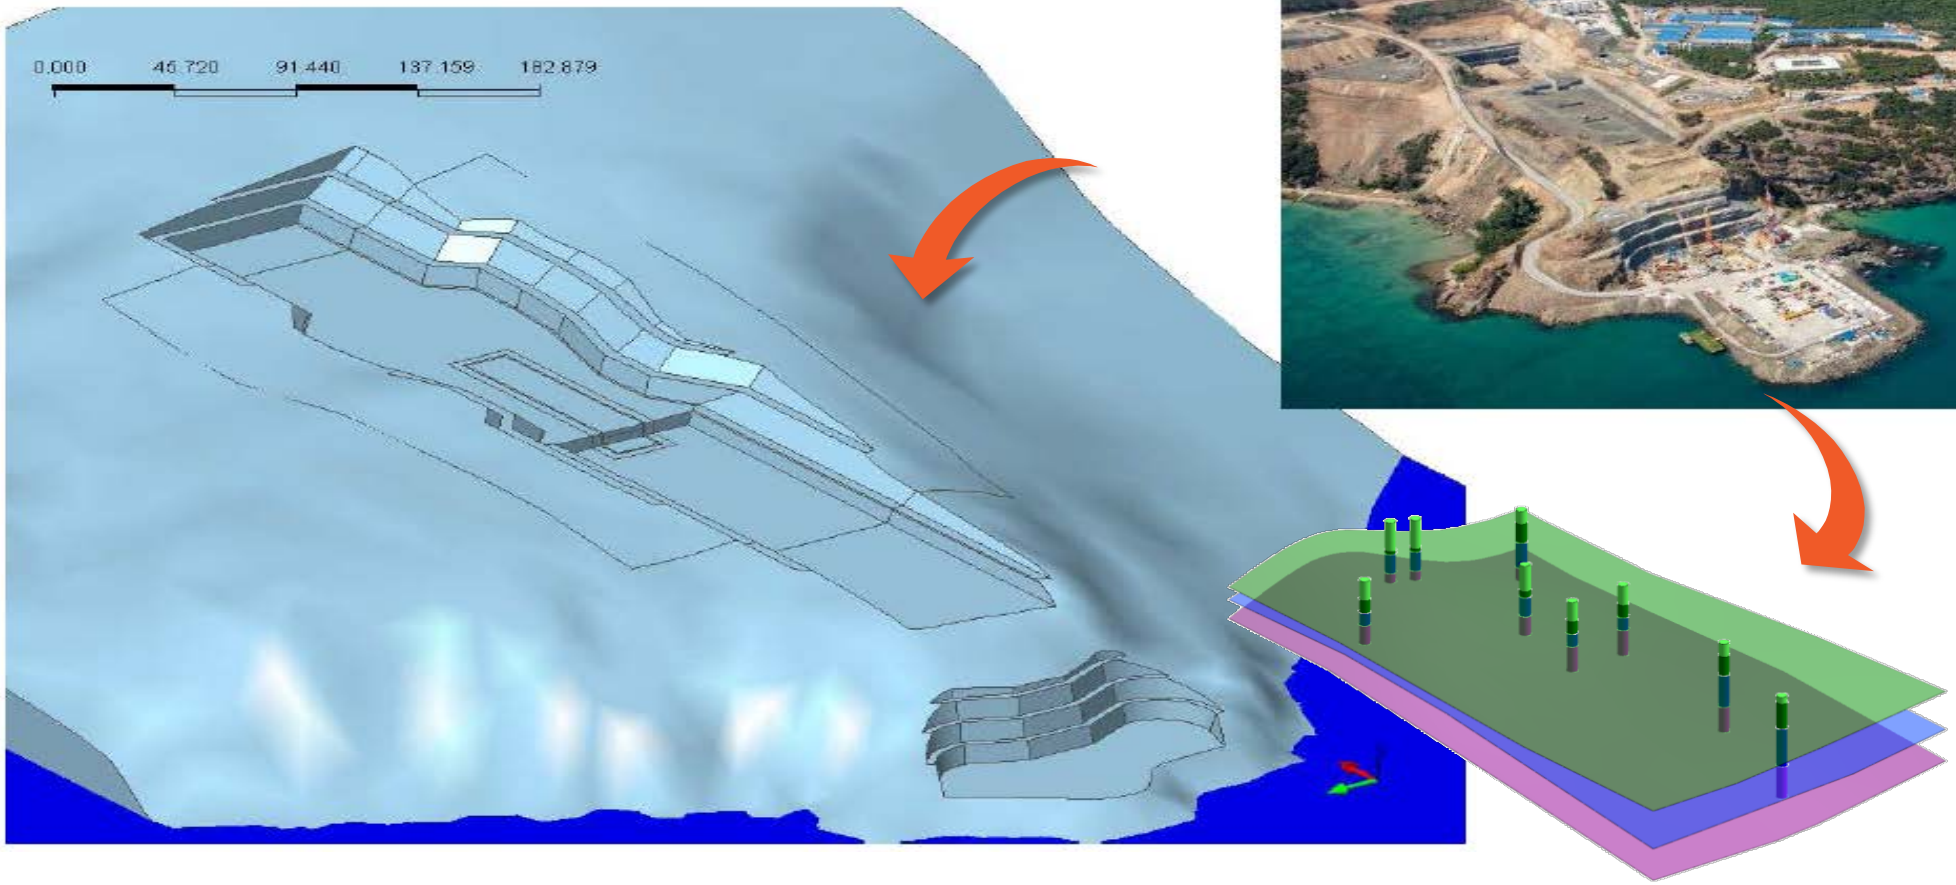

How to enhance your design process

- **TGM & Bedding plane wizard**

  Easily create the surface of the site by simple topography import

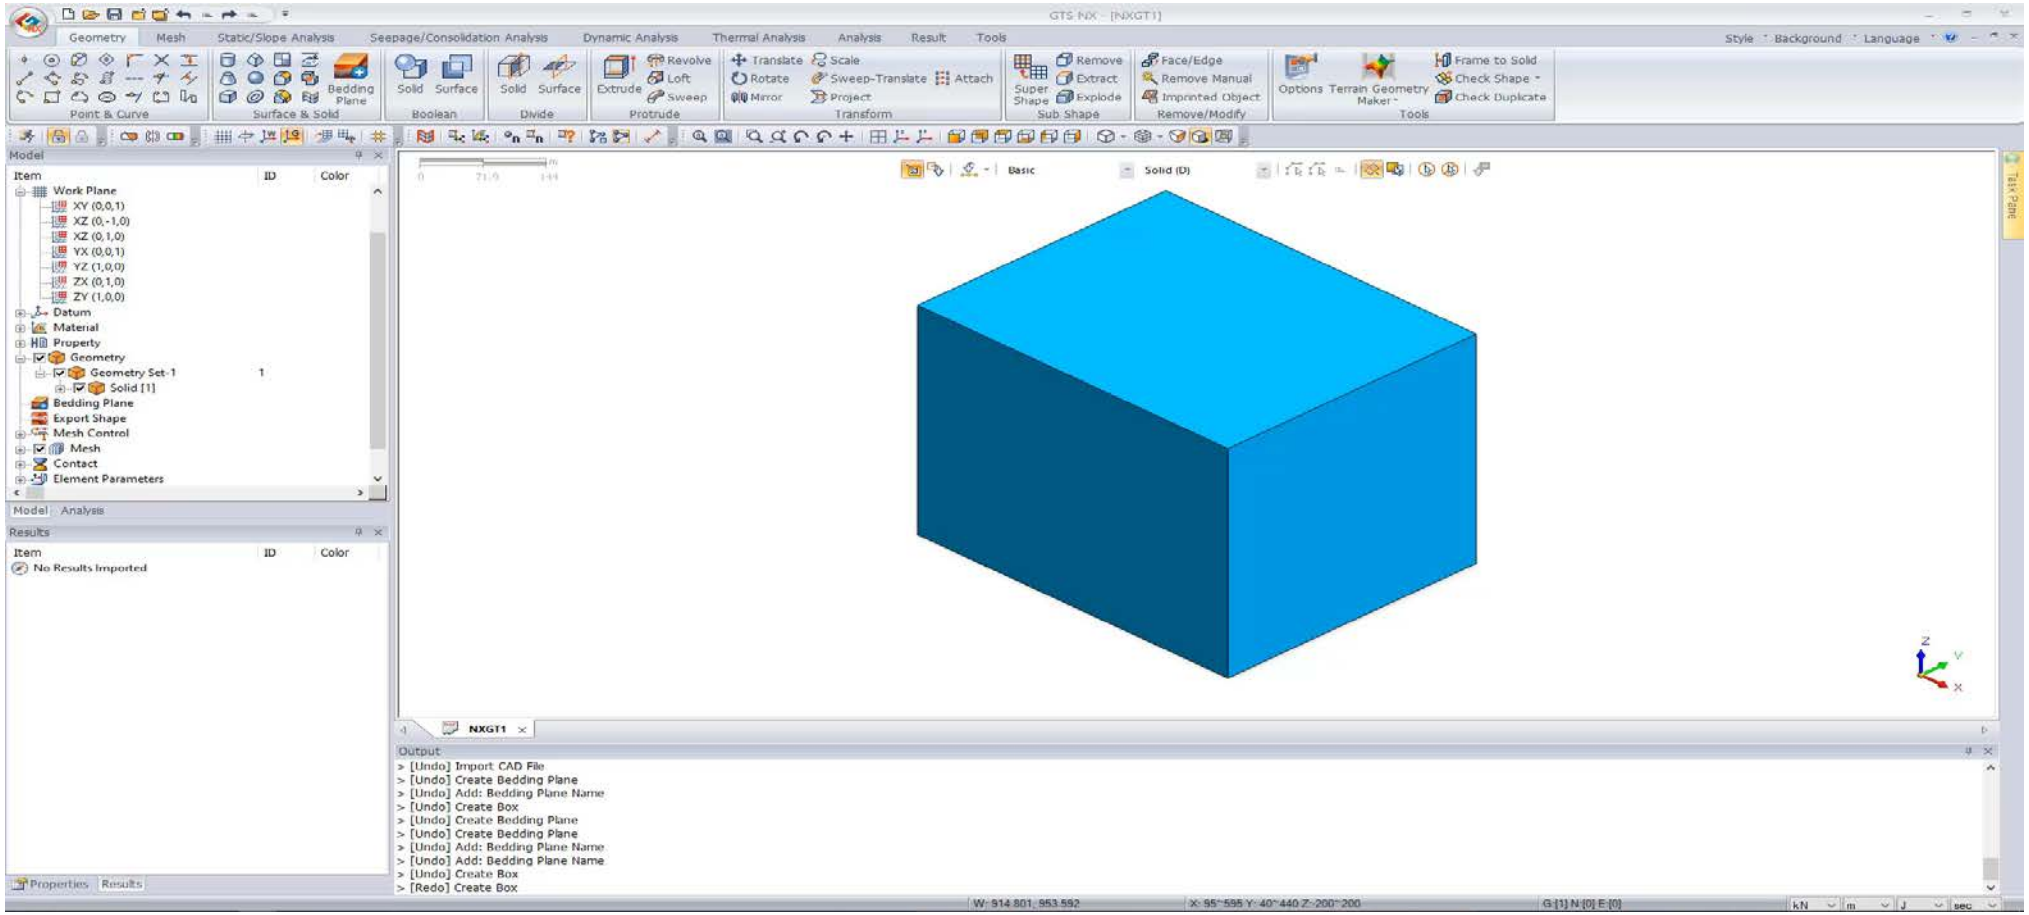

How to enhance your design process

- **TGM & Bedding plane wizard**
  Powerful meshing algorithm with Hybrid technology

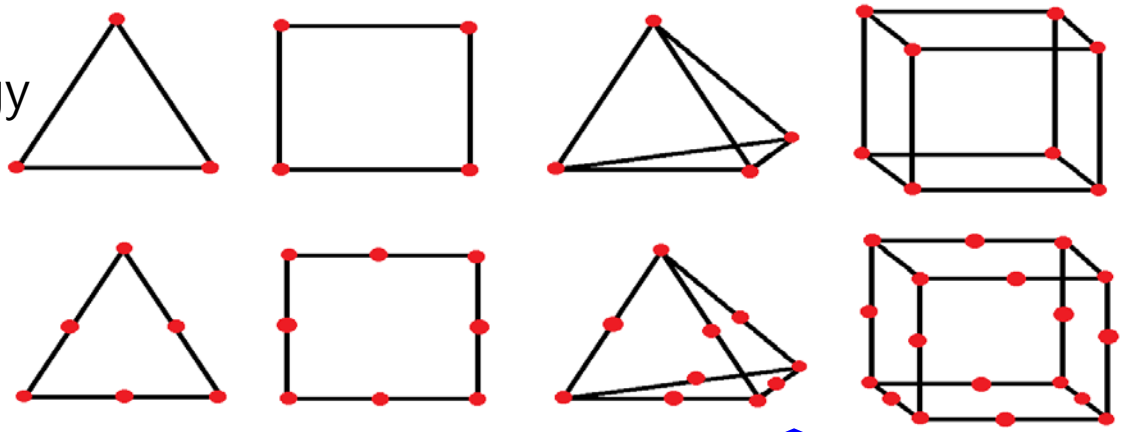

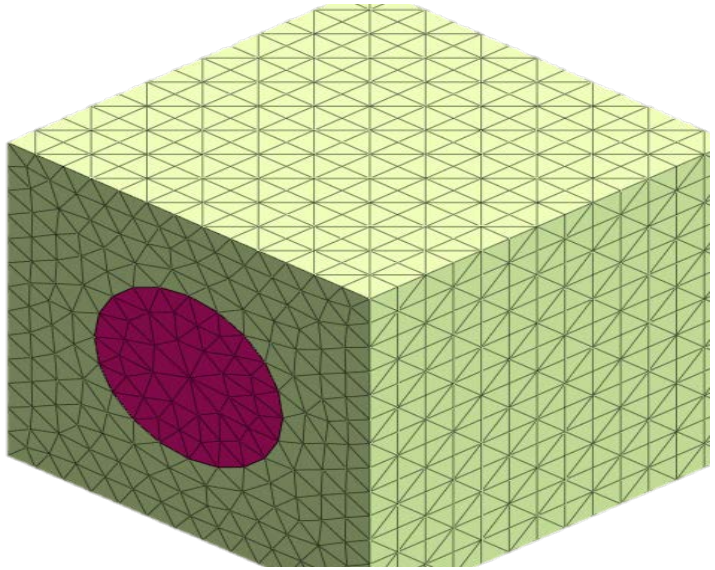

Tetrahedral

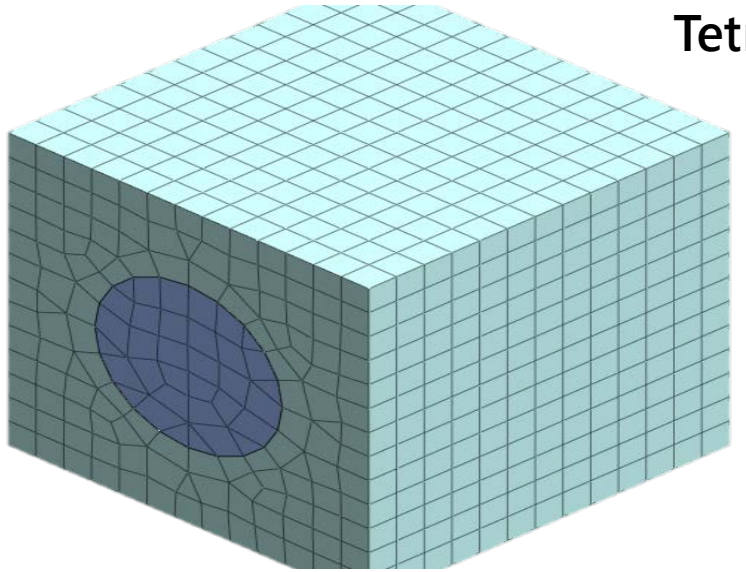

Hexahedral

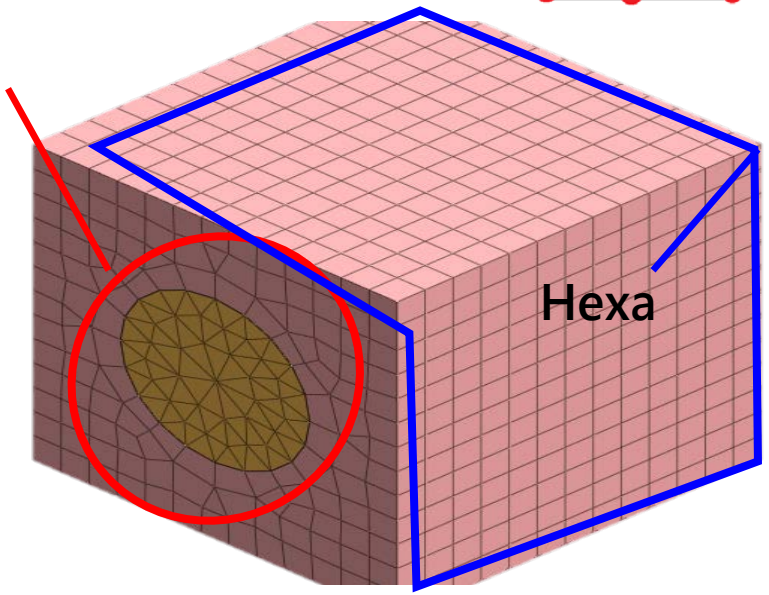

Tetra + Hexa(hybrid)

How to enhance your design process

- **Boundary conditions & Loads**

Boundary

Constraint
Change Properties
Review
Water level
Nodal Head
Surface Flux
Slip Circle/Polygonal Surface
Draining Condition
Non Consolidation
Transmitting

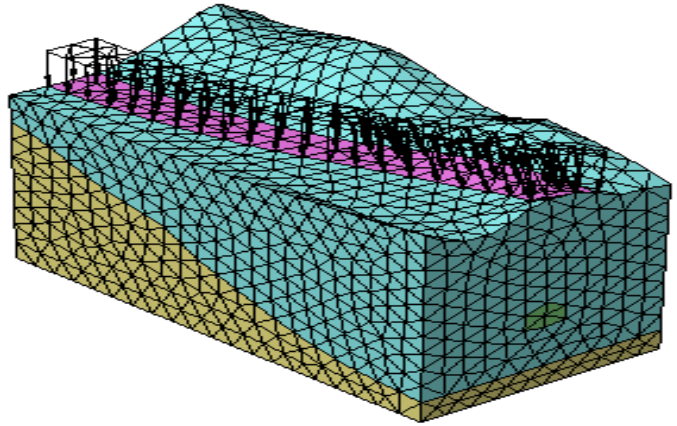

Loads

Self Weight
Force
Moment
Displacement
Pressure(Surcharge / Water)
Line Beam Load
Element Beam Load
Temperature
Pre-stress
Contraction
Initial Equilibrium Force
Combined Load
Response Spectrum
Ground Acceleration
Time Varying Static
Dynamic Nodal / Surface
Load to Mass
Train Dynamic Load Table

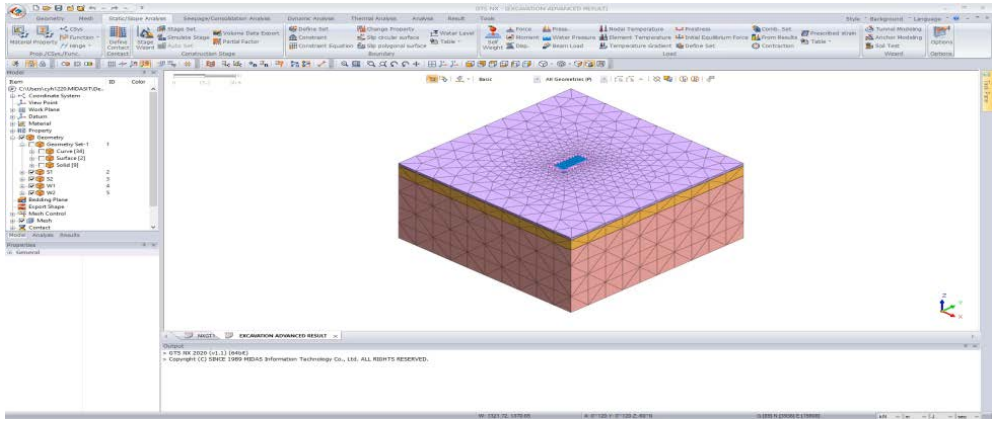

How to enhance your design process

- **Water condition control – nodal head, line & surface flux, water level**

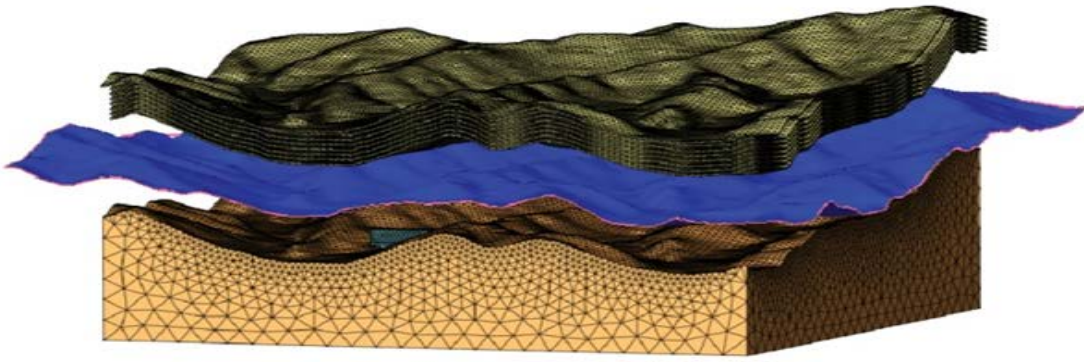

3D water level automatic generation

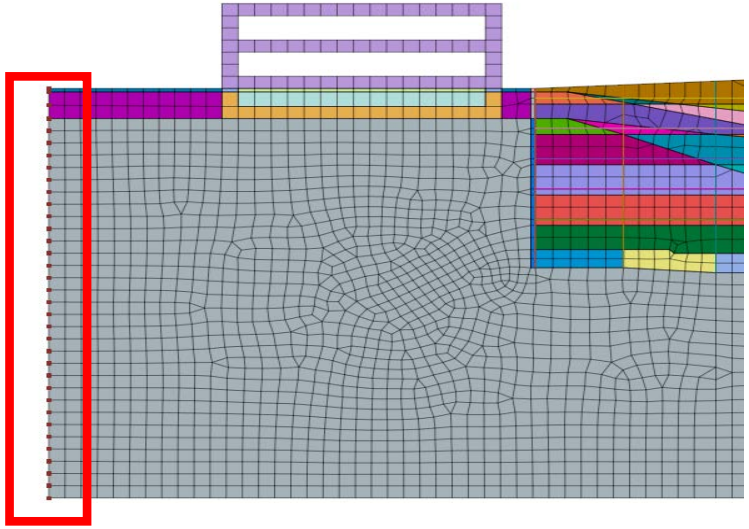

Nodal head for water level

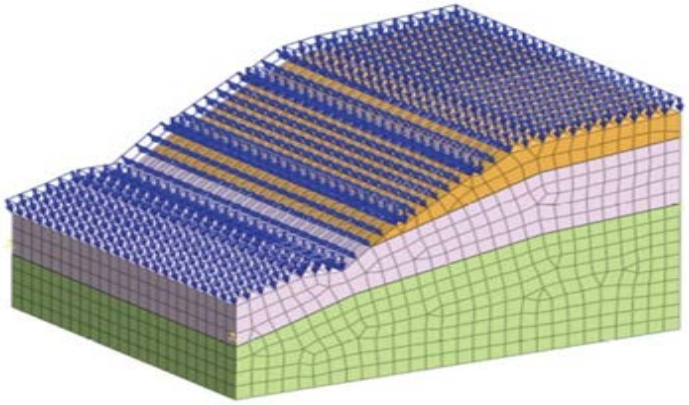

Rainfall intensity input

How to enhance your design process

- **Easy check result – 1D/2D Equivalent Elements**

實體元素
(擋土柱)

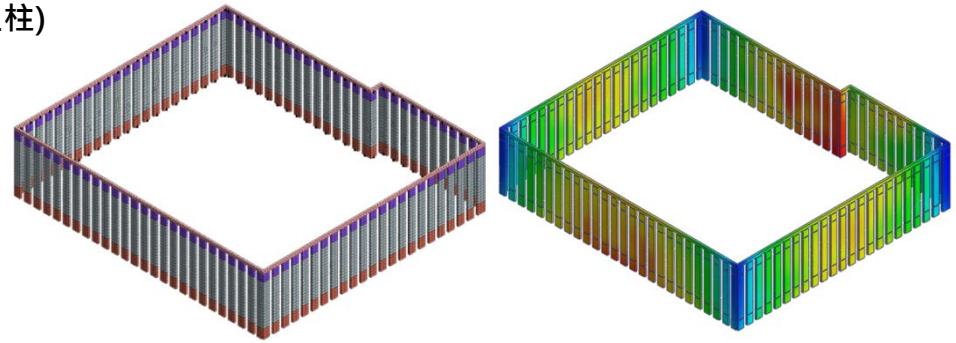

如何計算等效軸力?

虛擬梁(Virtual Beam)

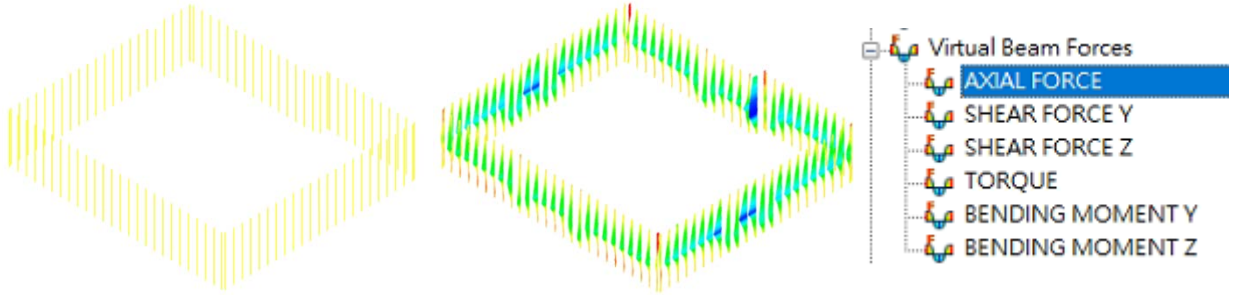

實體元素

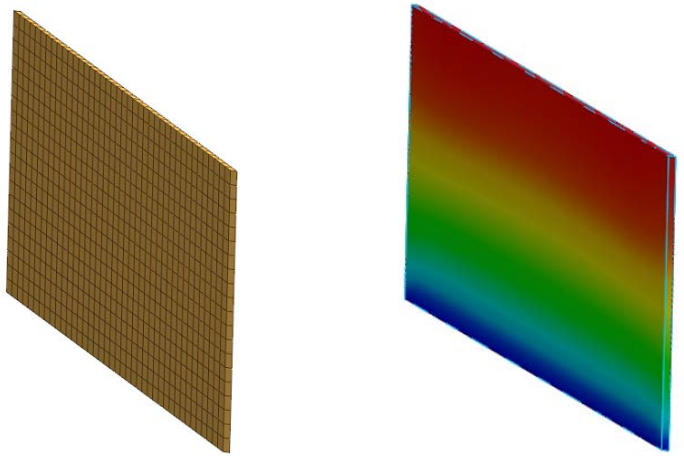

如何得到受力方向大小?

測量板(Gauging Shell)

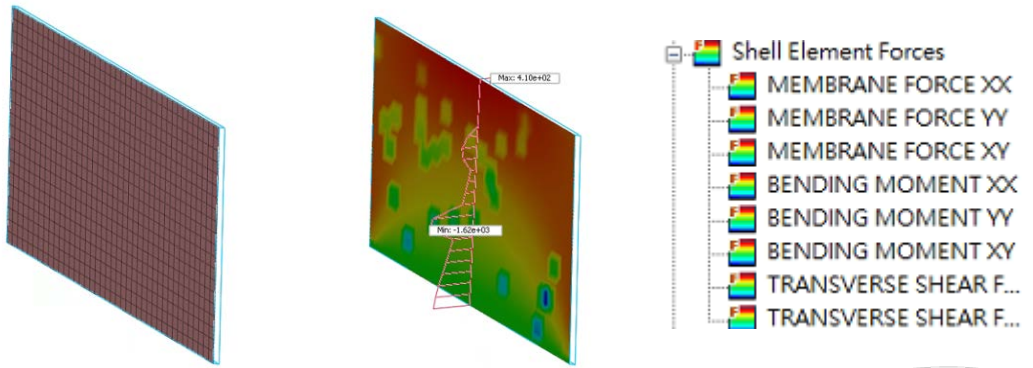

How to enhance your design process

- Easy check result - various types of results

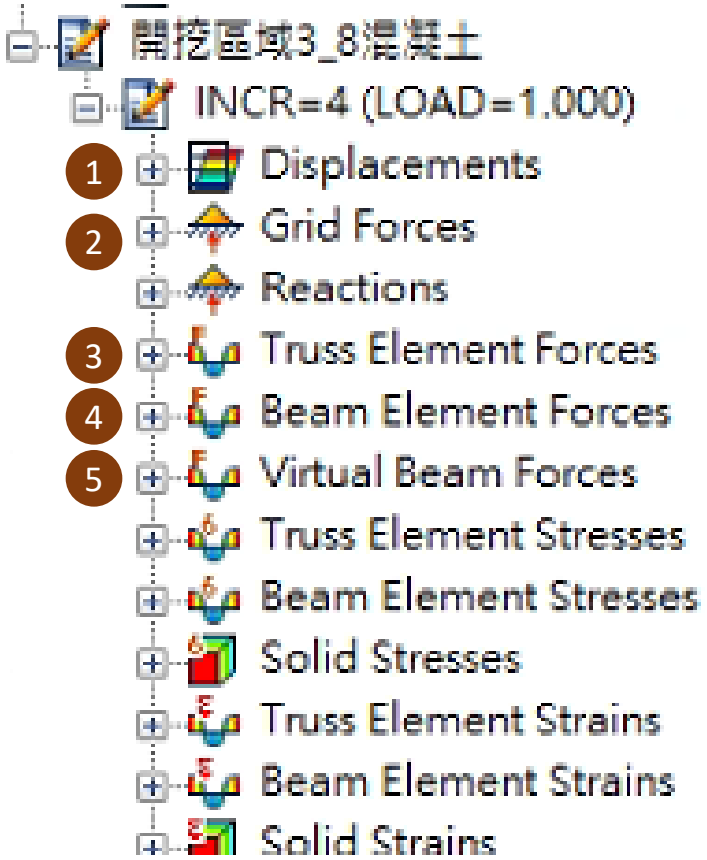

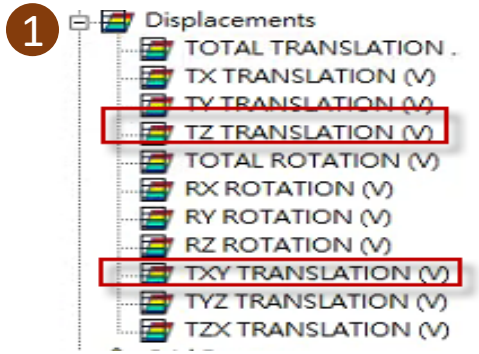

水平變位TXY
垂直變位TZ

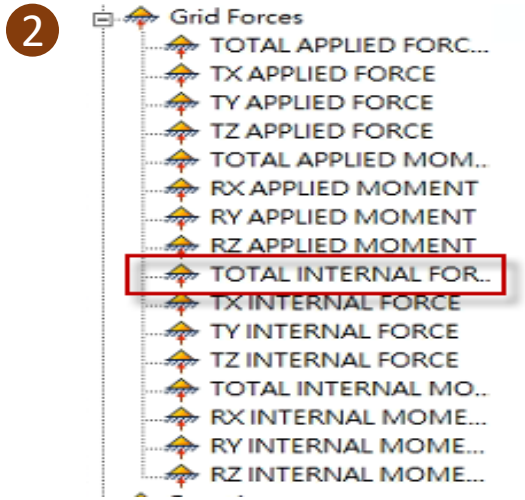

內力
Grid Force

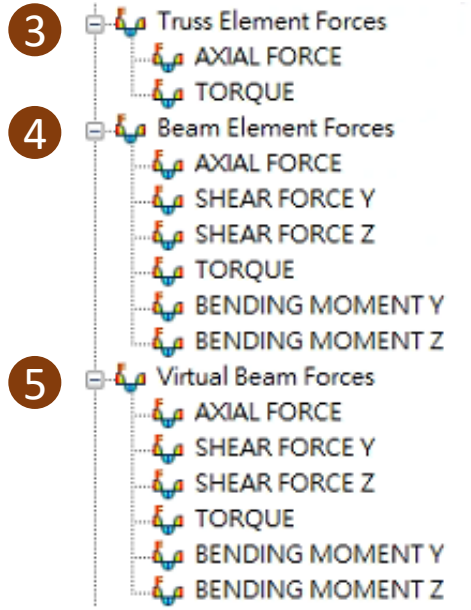

軸力
Axial Force

How to enhance your design process

- **Easy check result - Probe**

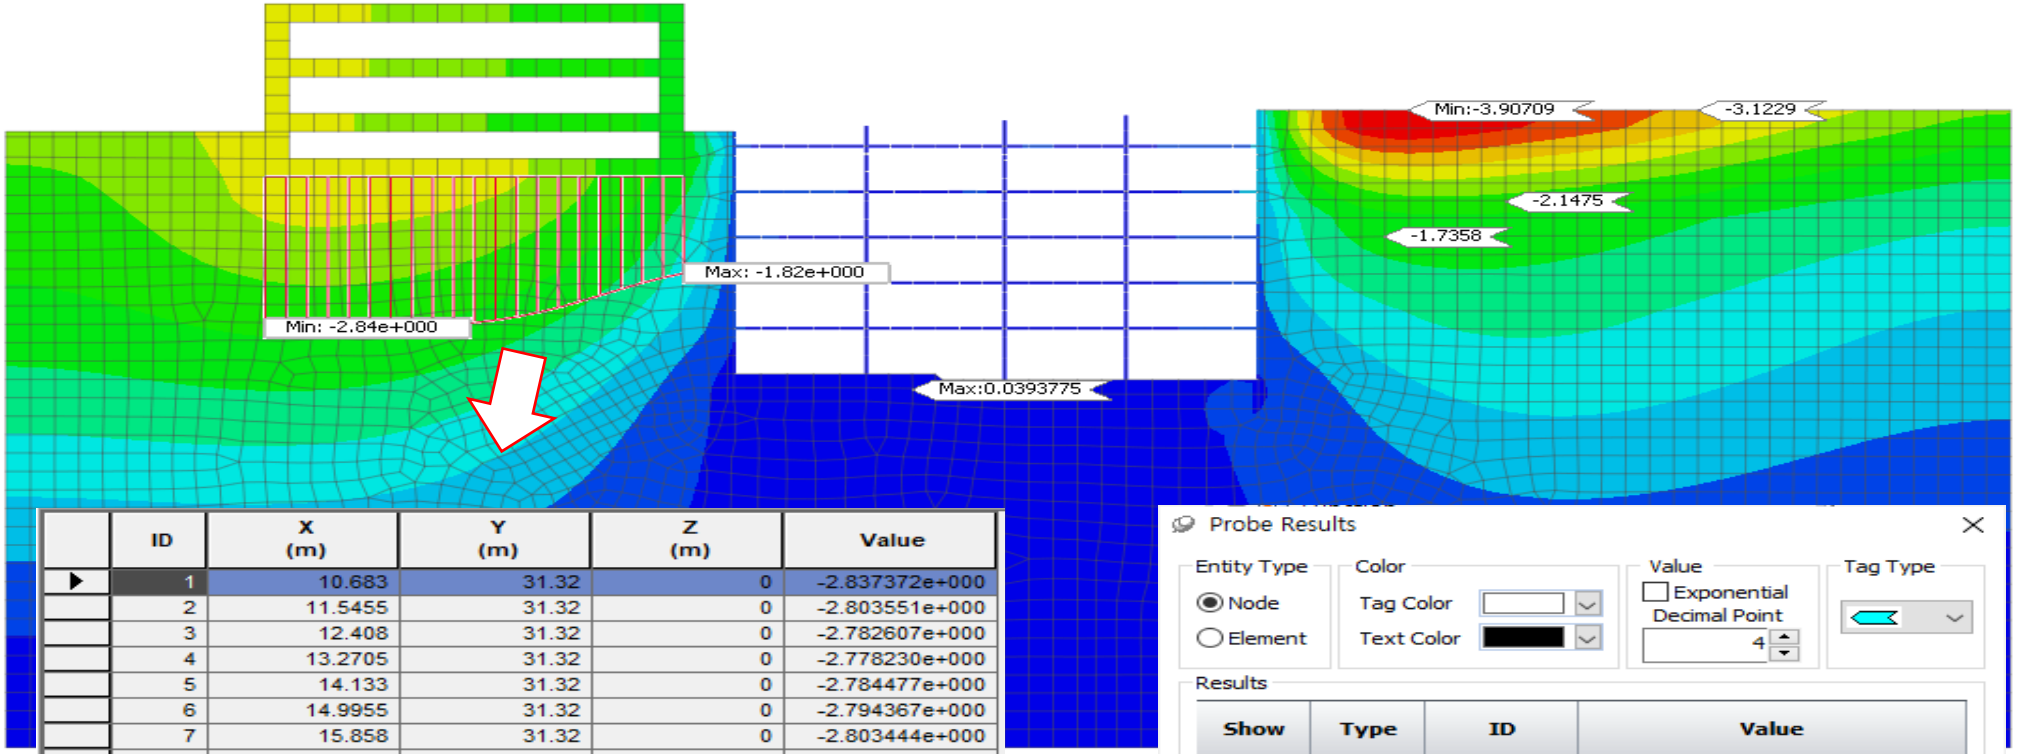

	ID	X (m)	Y (m)	Z (m)	Value
▶	1	10.683	31.32	0	-2.837372e+000
	2	11.5455	31.32	0	-2.803551e+000
	3	12.408	31.32	0	-2.782607e+000
	4	13.2705	31.32	0	-2.778230e+000
	5	14.133	31.32	0	-2.784477e+000
	6	14.9955	31.32	0	-2.794367e+000
	7	15.858	31.32	0	-2.803444e+000
	8	16.7205	31.32	0	-2.806896e+000
	9	17.583	31.32	0	-2.799891e+000
	10	18.4455	31.32	0	-2.781048e+000
	11	19.308	31.32	0	-2.748633e+000
	12	20.1705	31.32	0	-2.701343e+000
	13	21.033	31.32	0	-2.638357e+000
	14	21.8955	31.32	0	-2.559416e+000
	15	22.758	31.32	0	-2.462966e+000
	16	23.6205	31.32	0	-2.353056e+000
	17	24.483	31.32	0	-2.235005e+000
	18	25.3455	31.32	0	-2.114296e+000
	19	26.208	31.32	0	-1.999796e+000
	20	27.0705	31.32	0	-1.900160e+000
	21	27.933	31.32	0	-1.815394e+000

Probe Results

Entity Type: Node / Element

Color: Tag Color, Text Color

Value: Exponential, Decimal Point 4

Tag Type

Results

Show	Type	ID	Value
☑	Node	6838	-1.6844
☑	Node	6855	-3.5239
☑	Node	6328	-4.2087
☑	Node	6318	-4.2110
☑	Node	6308	0.8818
☑	Node	6289	0.9327
☐			

Max | Min | Abs Max | Clear All

☐ Min/Max Value of Each Part

Close

How to enhance your design process

- **Easy check result – clipping & probe**

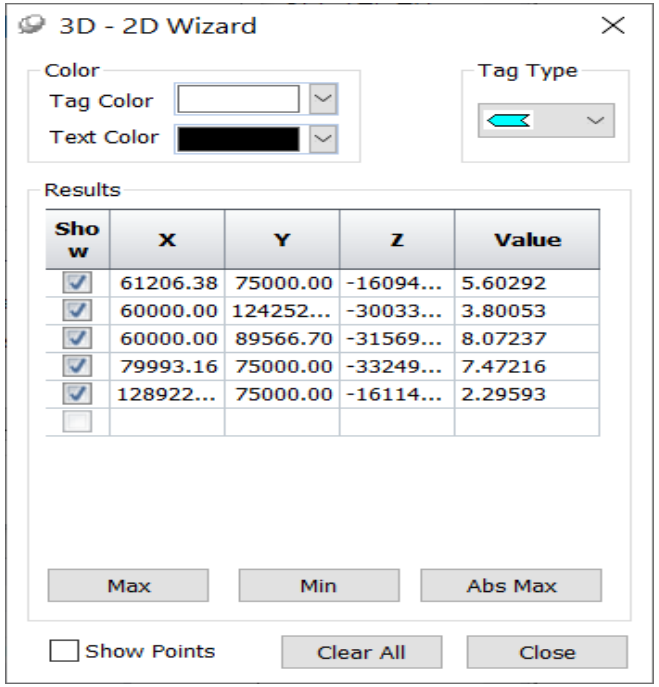

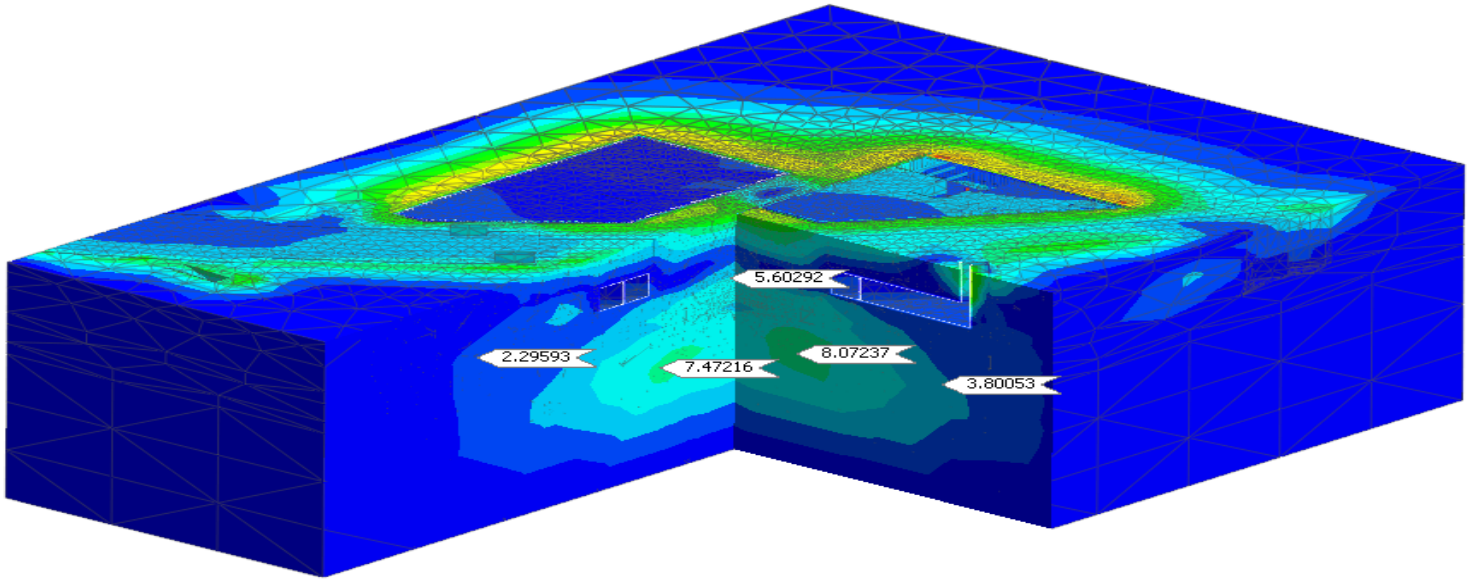

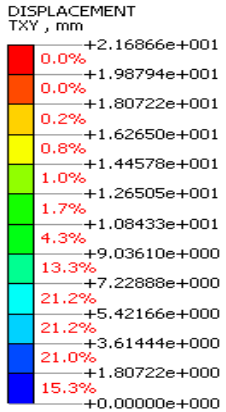

How to enhance your design process

- **Analysis results review by 3D PDF Report with out software license**

materials and properties with "**PDF**" format

Material

GTS NX

Elastic

Name	E (kN/mm²)	Inc. of Elastic (kN/mm³)	Inc. of E Ref. Height (mm)	v	γ (kN/mm³)	Ko	Thermal Coeff. (1/[T])	Molecular Vapor Diffusion Coeff. (mm/sec²)	Thermal Diffusion Enhancement	Damping Ratio
	γ_sat (kN/mm³)	e_o	kx (mm/sec)	ky (mm/sec)	kz (mm/sec)	Ss (1/mm)	Conductivity (W/(mm·[T]))	Specific Heat (J/(ton·[T]))	Heat Gen. Factor	
5:Conc'	28	0	0	0.15	2.4e-008	-	1e-006	0	0	0.05
	2.1e-008	0.5	0.01	0.01	0.01	5.2302133 3e-009	0	0	1	
6:Steel	205	0	0	0.15	7.4e-008	-	1e-006	0	0	0.05
	2.1e-008	0.5	0.01	0.01	0.01	5.2302133 3e-009	0	0	1	

MIDAS

Results export with "**WORD**" format

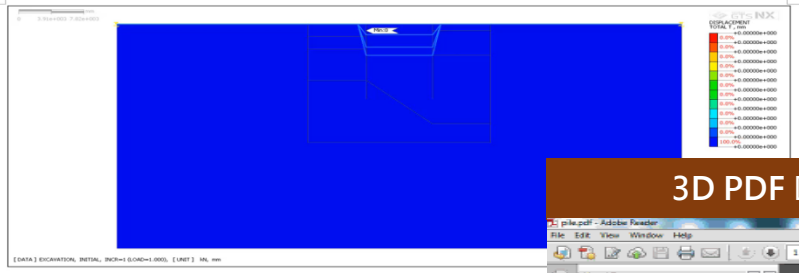

EXCAVATION_INITIAL_INCR=1 (LOAD=1.000)_Displacements (V)_Current.png

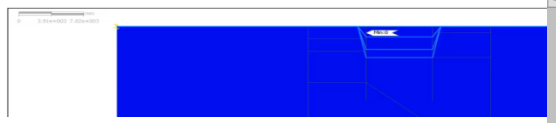

3D PDF Directly checking every results from 3D PDF

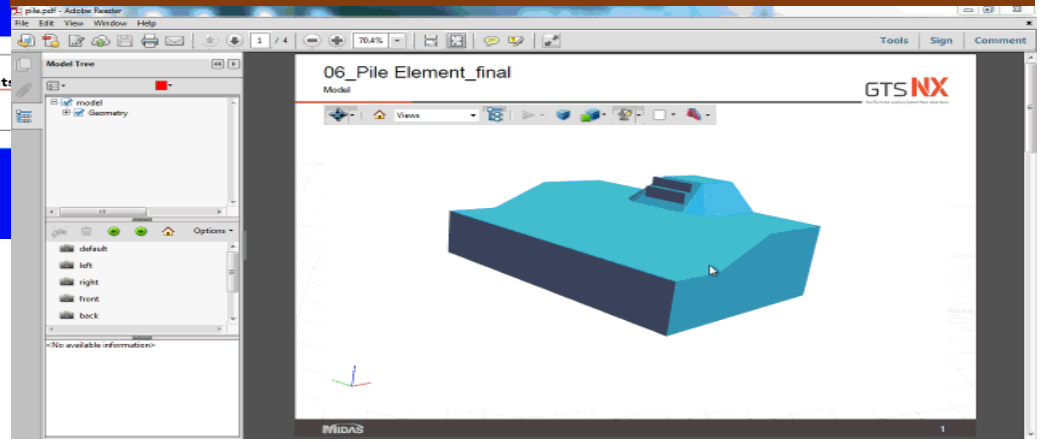

Technical support system

- Help manuals / Tutorials with various topics

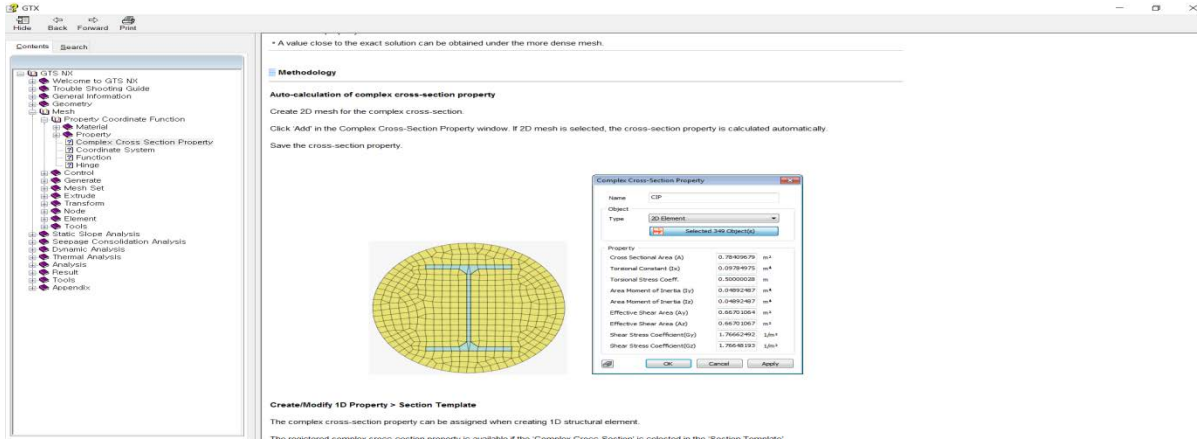

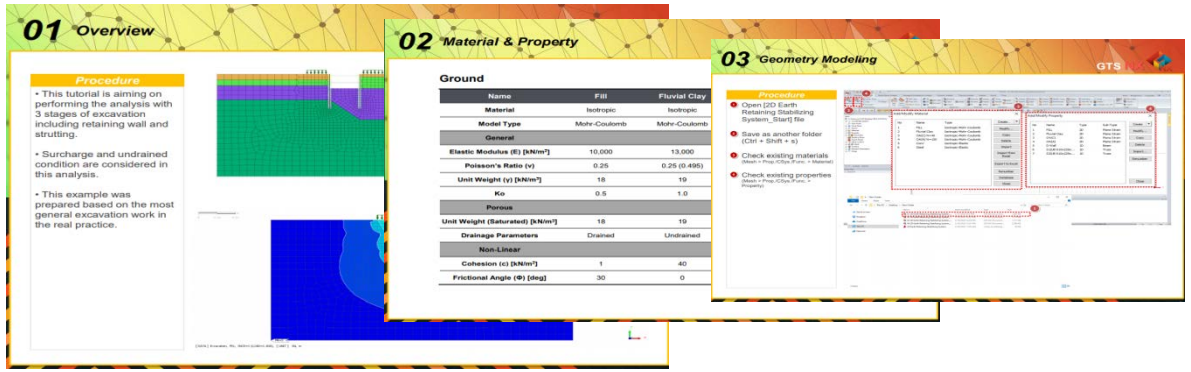

- Taiwan MIDAS Solid-Simulation website

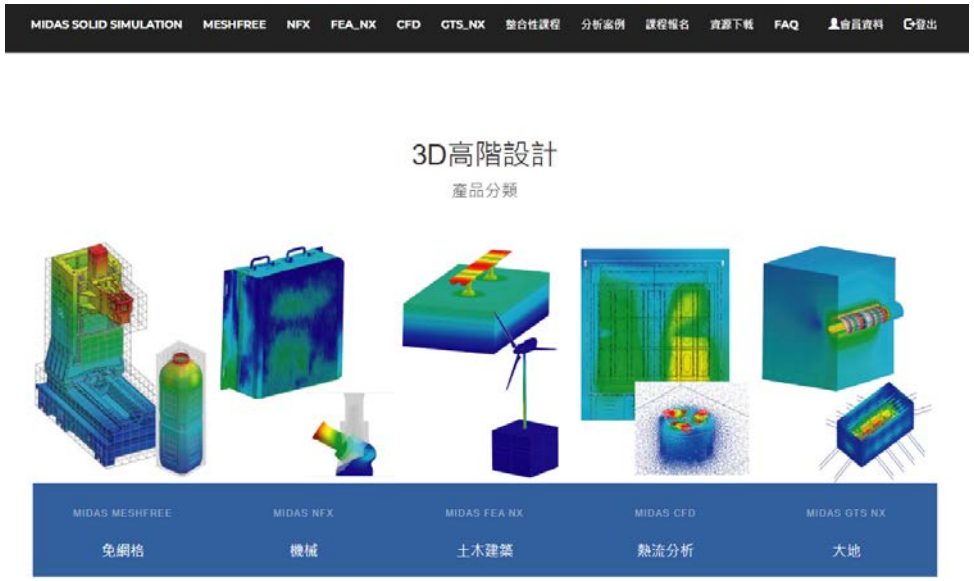

https://www.midasuser.com.tw/SolidSimulation/

Technical support system

- Various training video contents

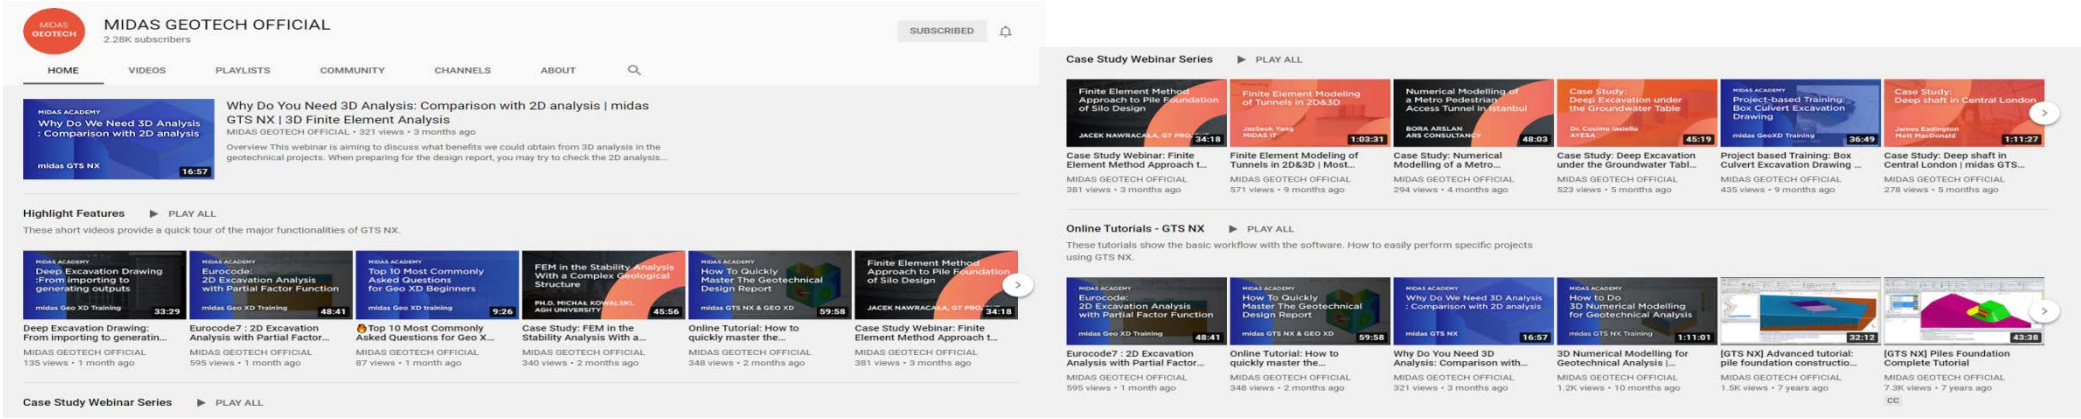

- Training Program (Online Course / Case study)

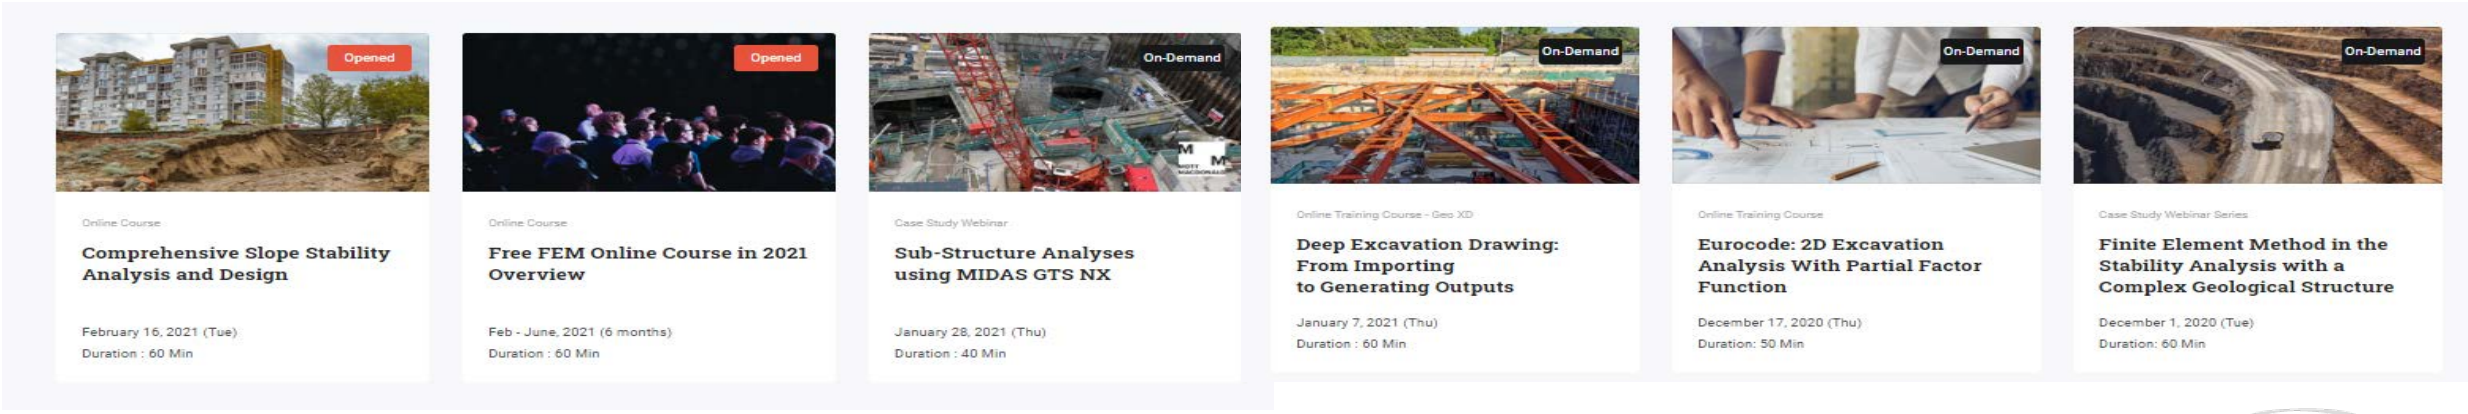

MIDAS Geotech has rich experience and know-how to grow the practical engineers

MIDAS
Case Study

3D島式開挖

2D分析

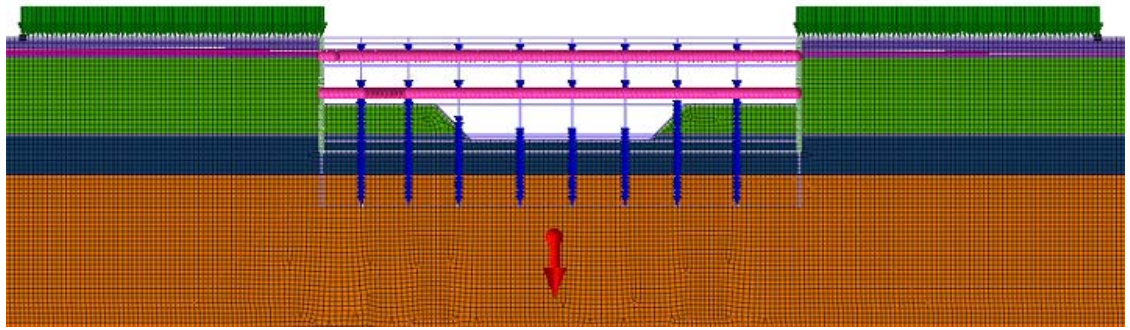

2D 建模只考慮模型的一個平面，縱向支撐、水平支撐和傾斜梁無法建模。

開挖面最大垂直位移 (m)

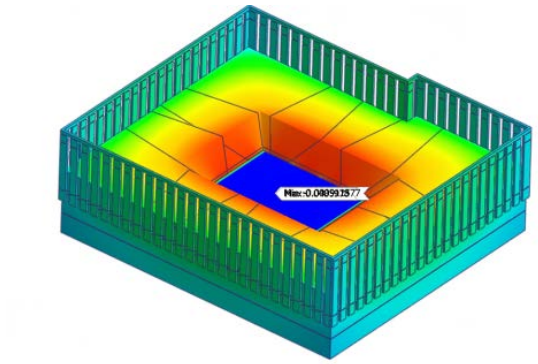

開挖面最大水平位移 (m)

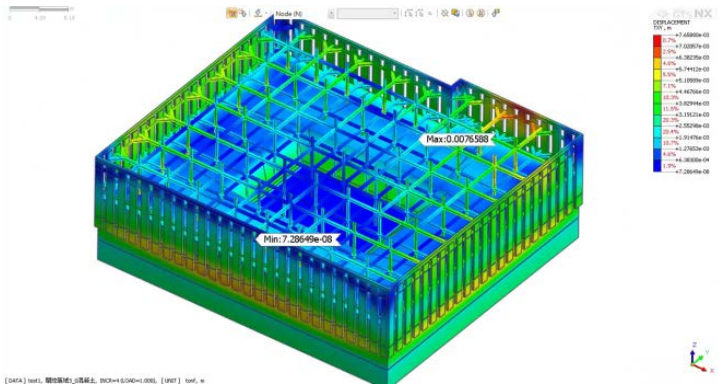

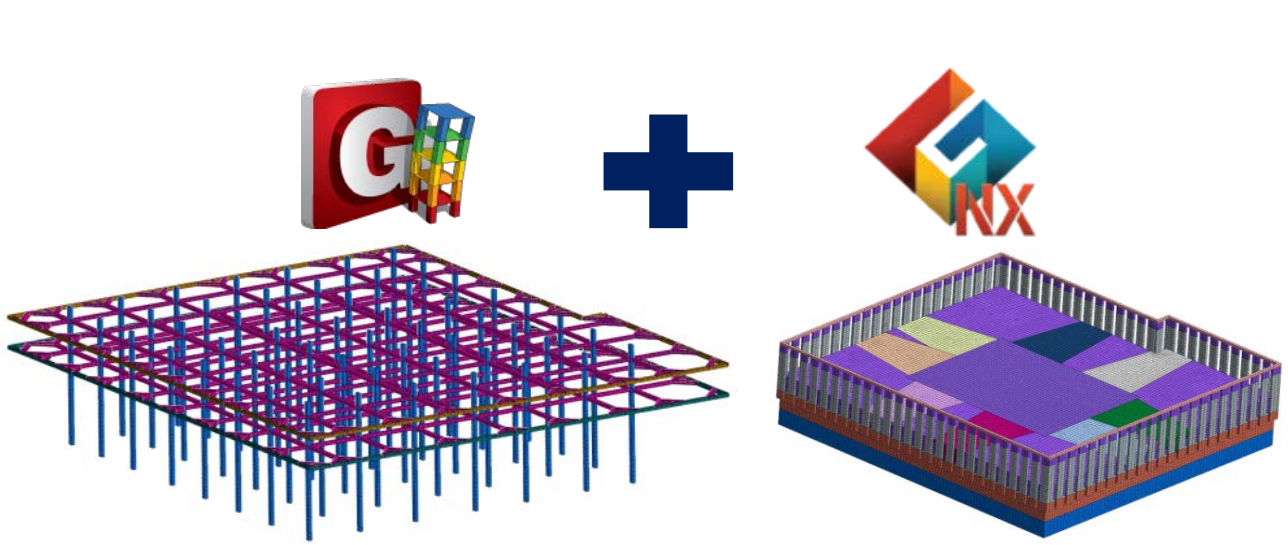

GEN+GTS 3D

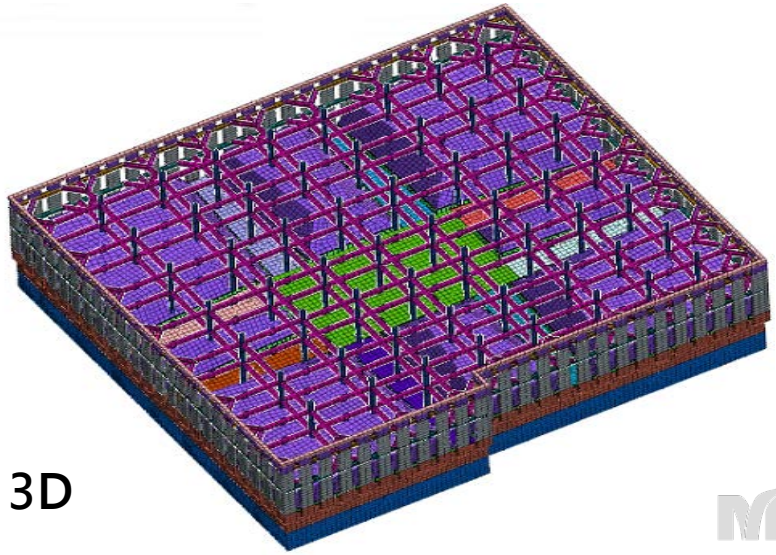

GTS NX NATM實例

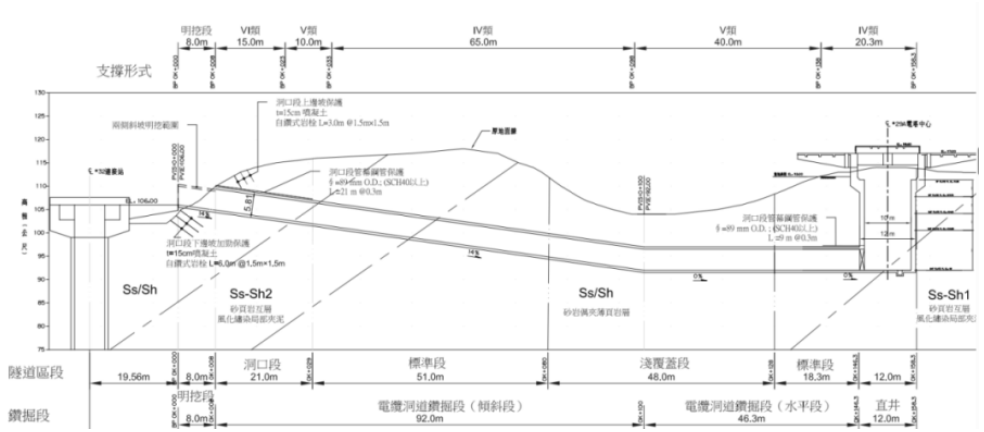

MIDAS/TGM

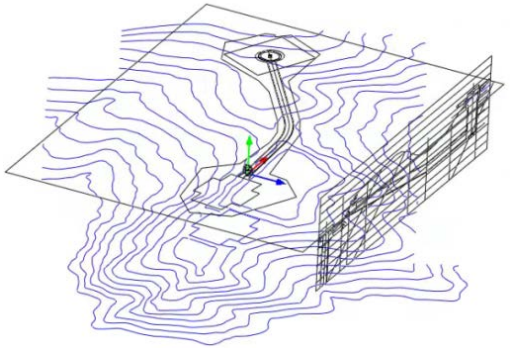

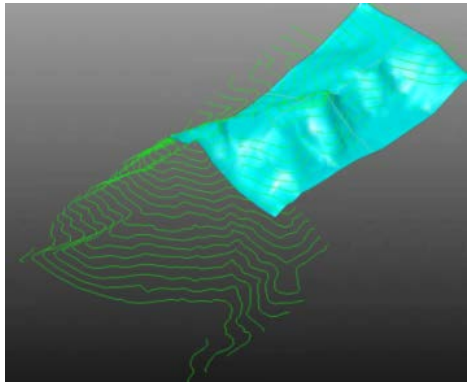

直井段

標準段

明挖段

洞口段

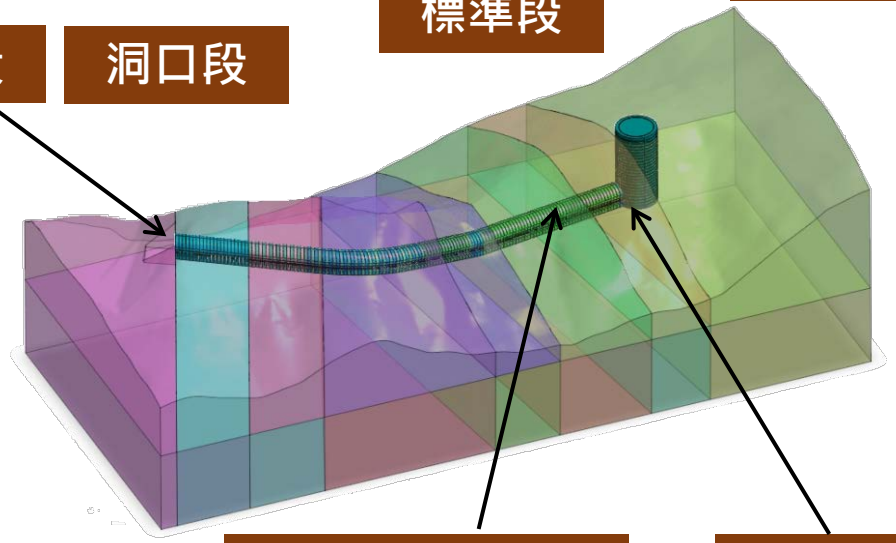

淺覆蓋標準段

標準段2

Hybird Mesher

(六面體 + 五面體 + 四面體)

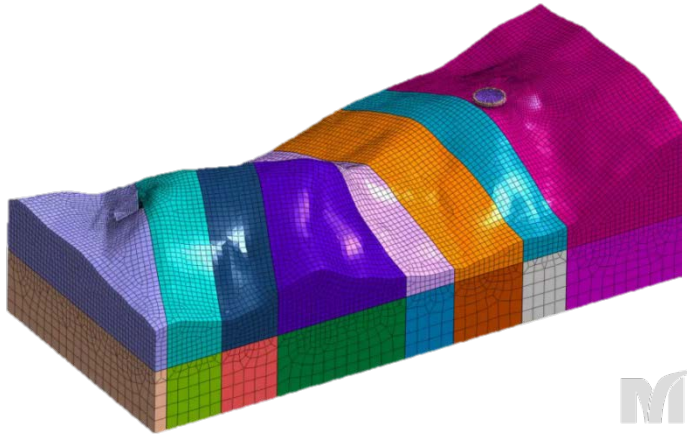

GTS NX NATM實例

GTS NX 混合網格/全共點建模

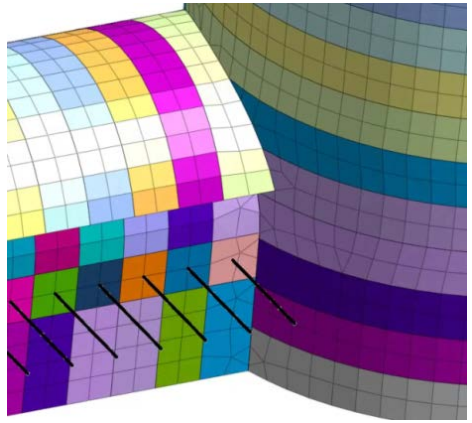

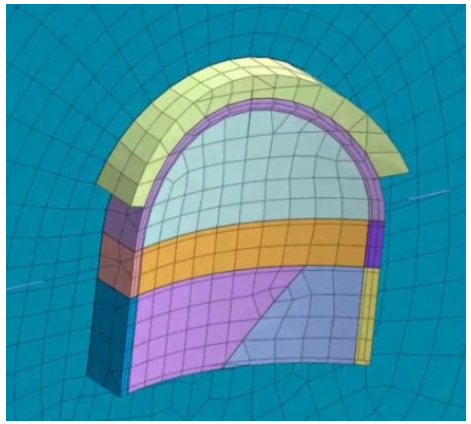

Shell Element(傳力裝置)

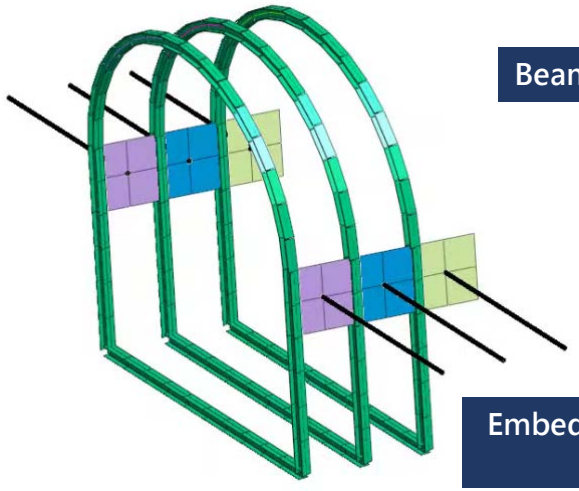

Beam Element(H型鋼)

Embedded Truss Element (Rock Bolt)

GTS NX 混合網格/全共點建模

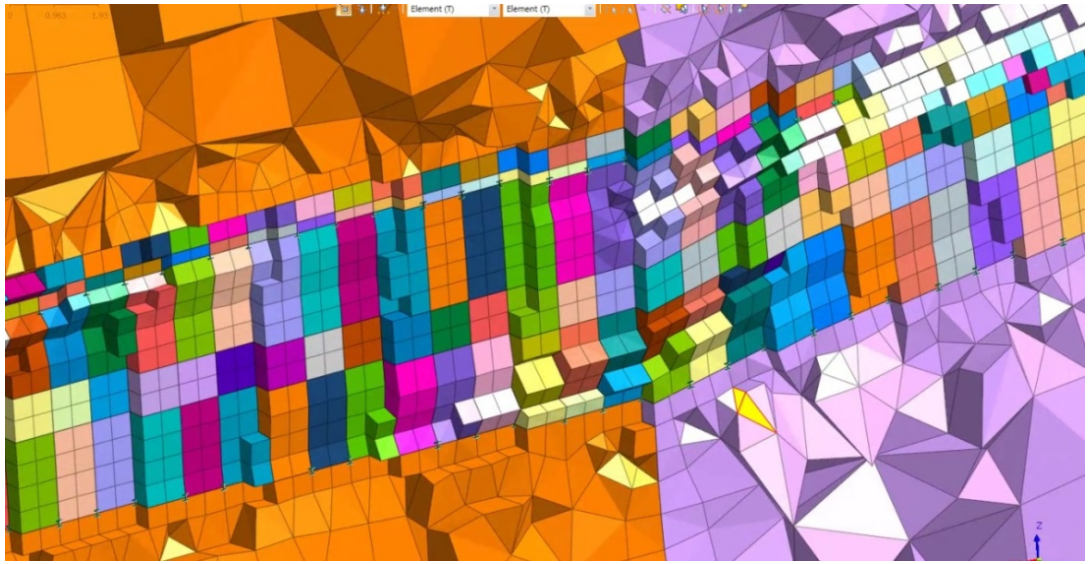

GTS NX NATM實例

直井段

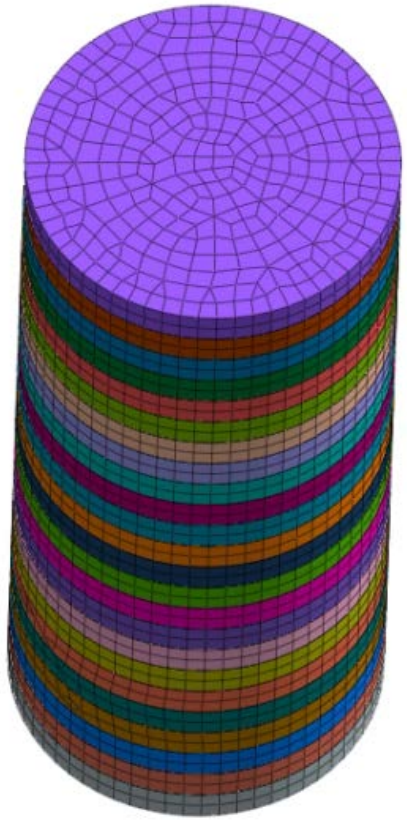

直井主開挖區

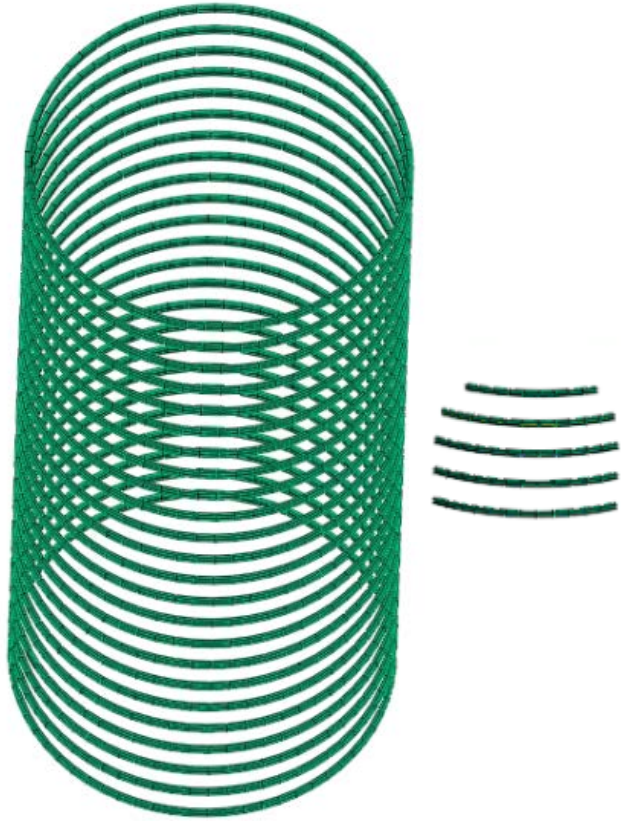

直井鋼支保

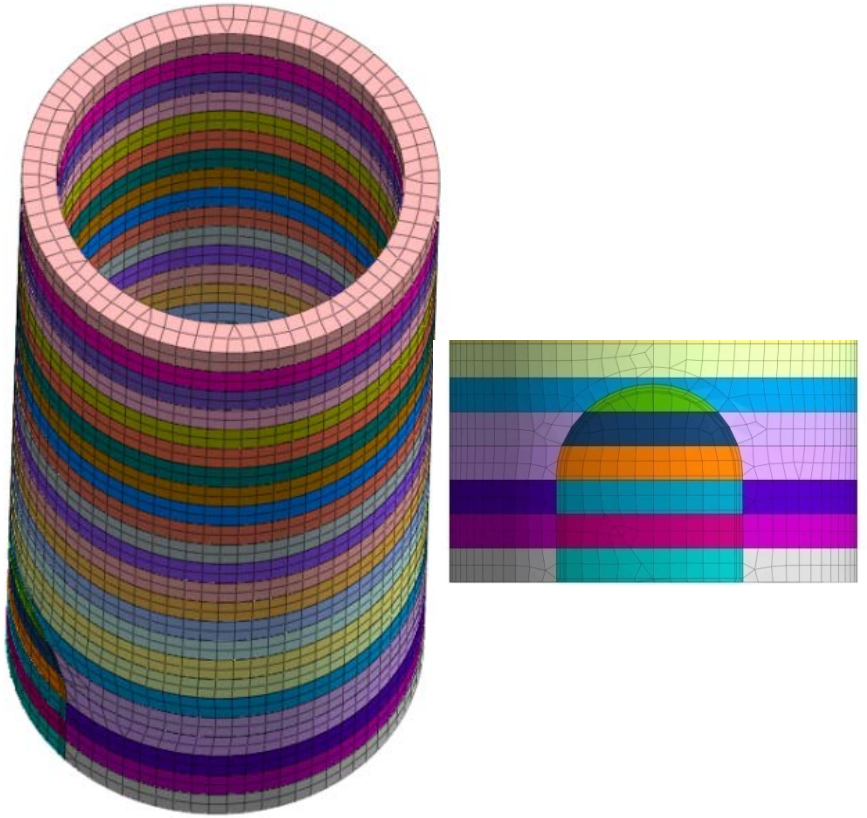

直井背填區

GTS NX NATM實例

隧道段

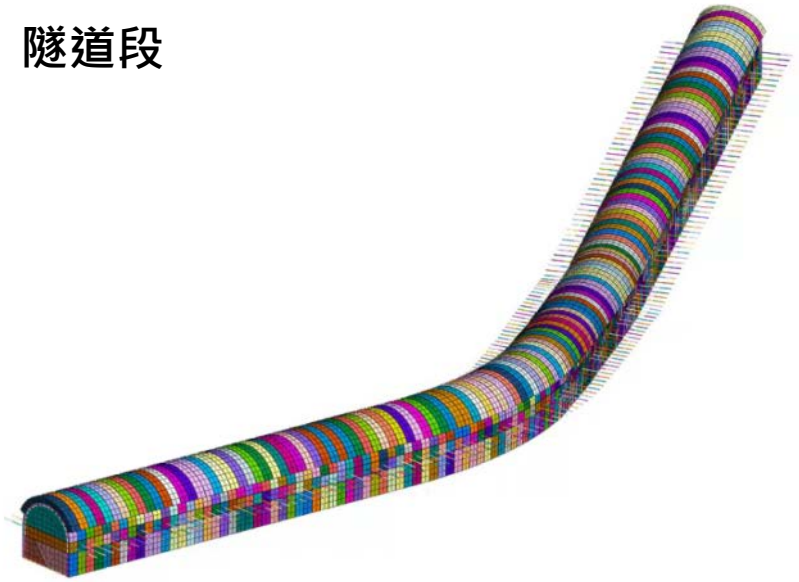

Anchors地錨（預力施加）

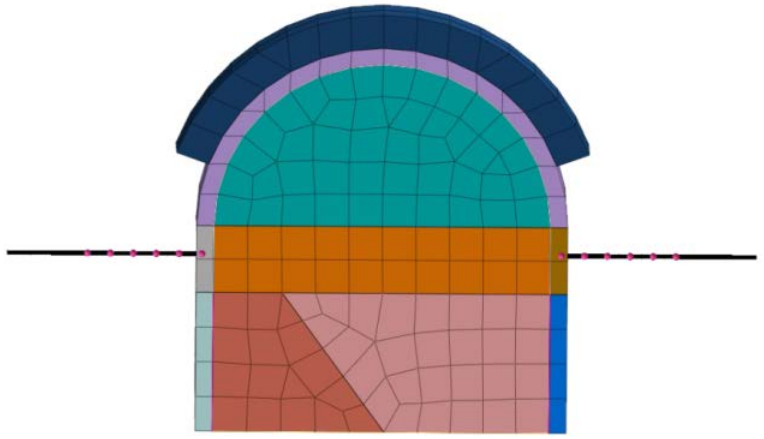

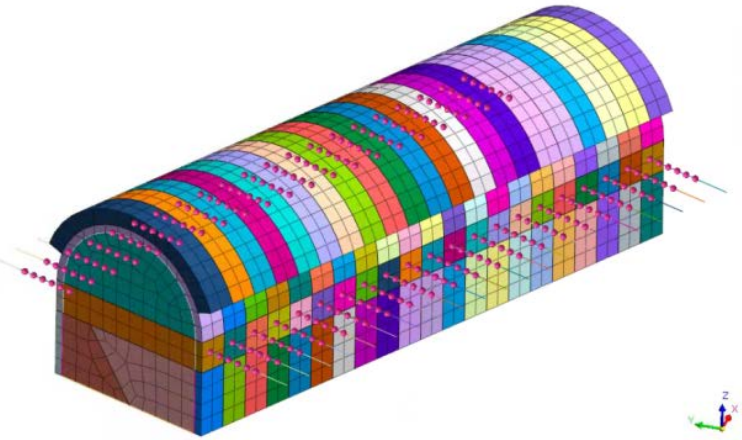

施工階段模組

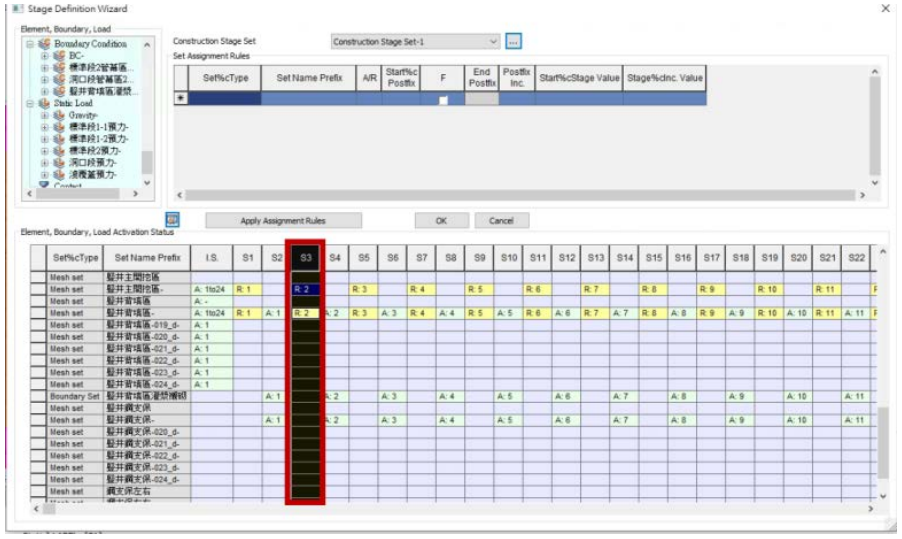

管幕區變更材質

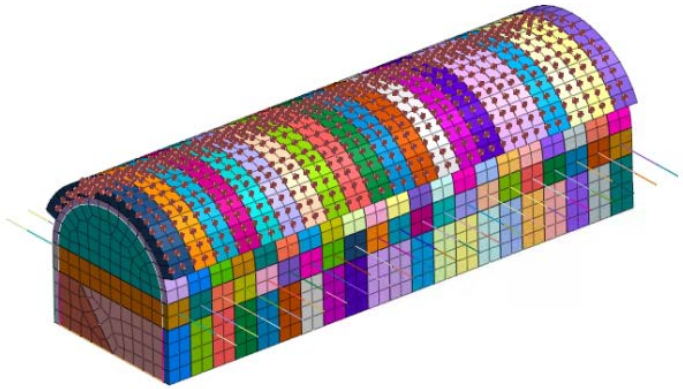

豎井背填灌漿和襯砌

GTS NX 邊坡穩定分析

- 2D分析 - 方法 1
  Limit Equilibrium Method(LEM)-極限平衡法 2D
- 2D分析 - 方法 2
  Stress Analysis Method (SAM)-應力分析法 2D
- 2D分析 - 方法 3
  Strength Reduction Method (SRM)-強度折減法 2D
- 3D分析
  Strength Reduction Method (SRM)-強度折減法 3D

GTS NX 2D邊坡穩定分析

開挖後邊坡穩定性計算

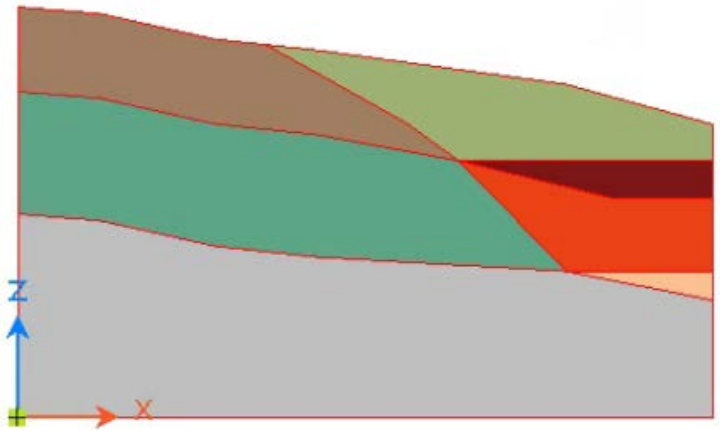

Weathered Soil
Weathered Rock
Soft Rock

2D分析-方式1.LEM

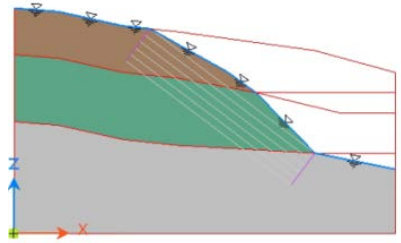

2D分析-方式2.SAM

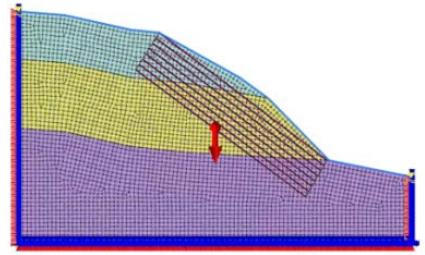

2D分析-方式3.SRM

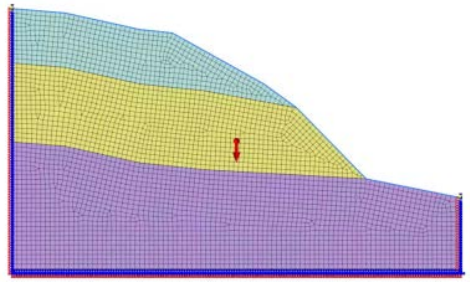

SRM：將邊坡地基材料的抗剪強度 (c , φ) 逐漸減小，直到計算過程中的發散點，此時假定發生了邊坡破壞，該點的最大強度折減率被認為是最小安全係數。

GTS NX 2D邊坡穩定分析

2D分析-方式1
LEM計算之安全係數1.4747

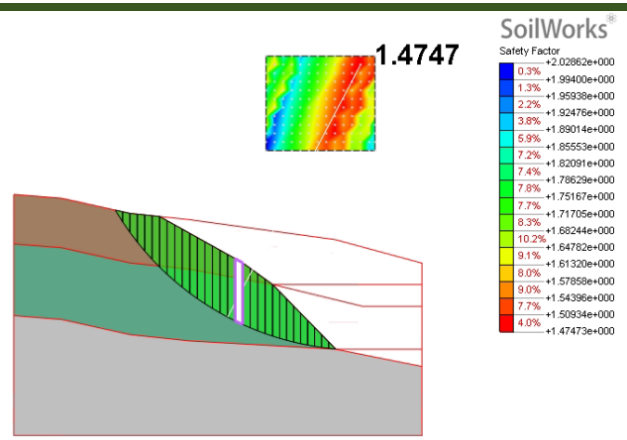

2D分析-方式2
SAM計算之安全係數1.50106

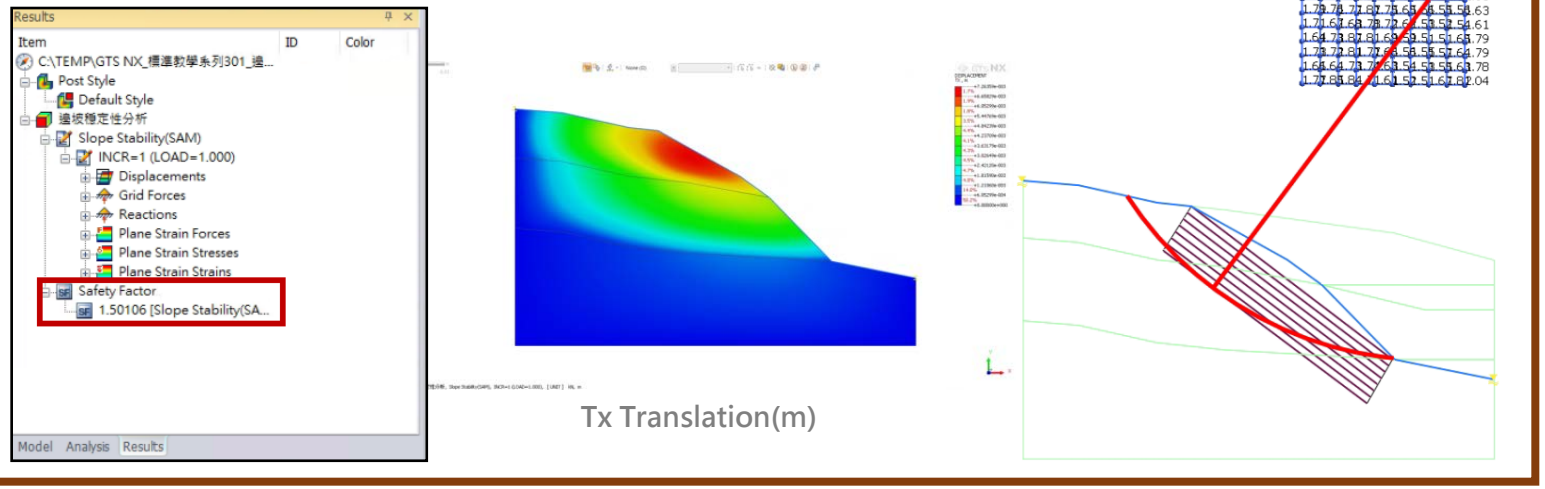

2D分析-方式3
SRM計算之安全係數1.50625

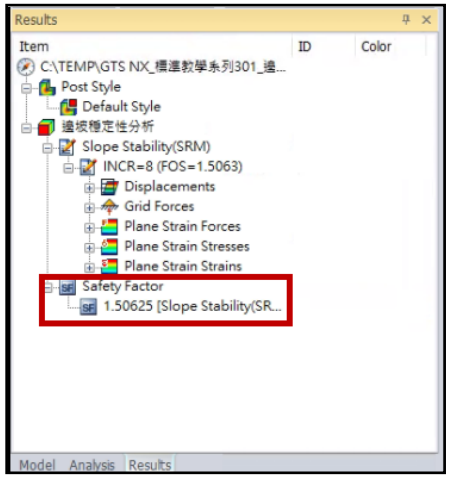

2D分析-方式3
SRM透過水平變形和最大剪切應變判斷破壞面

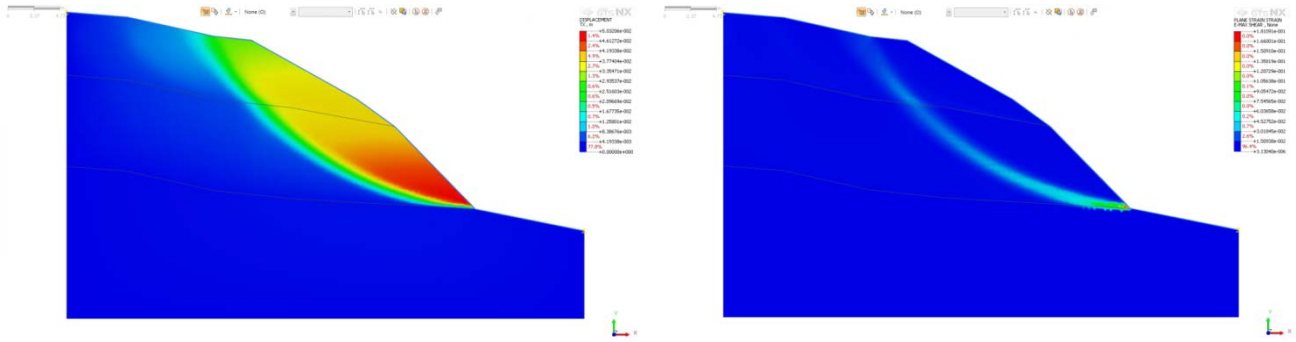

GTS NX 3D邊坡穩定分析

Strength Reduction Method (SRM)

3D地形面特徵

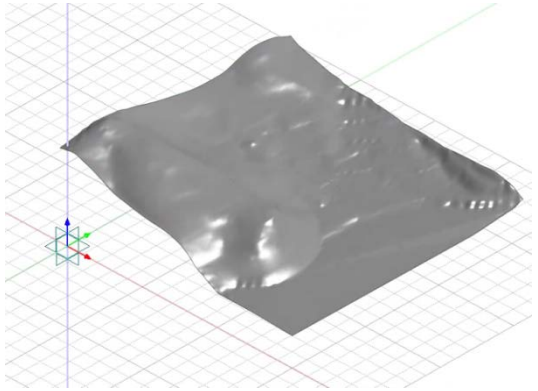

300m ×300m

3D地形實體特徵

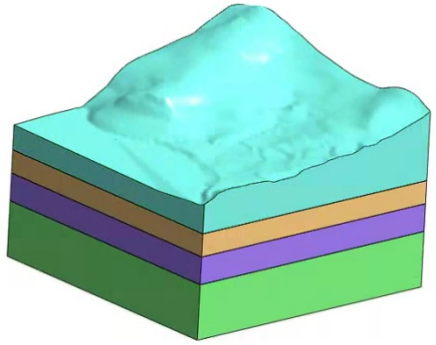

自重

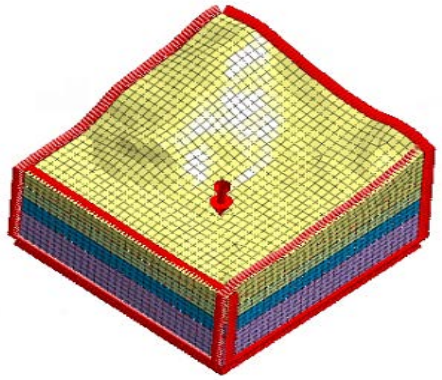

3D分析
SRM計算之安全係數1.5125

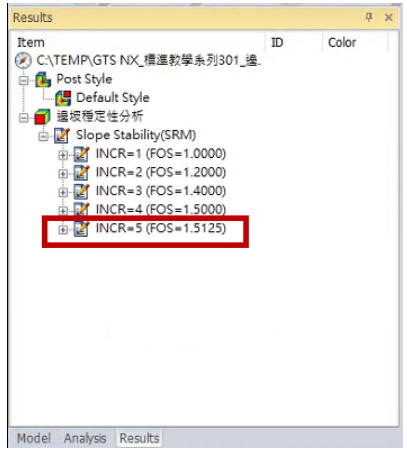

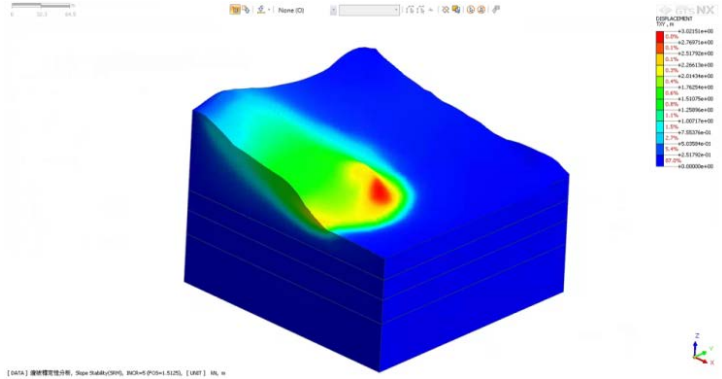

Tx Translation(m)

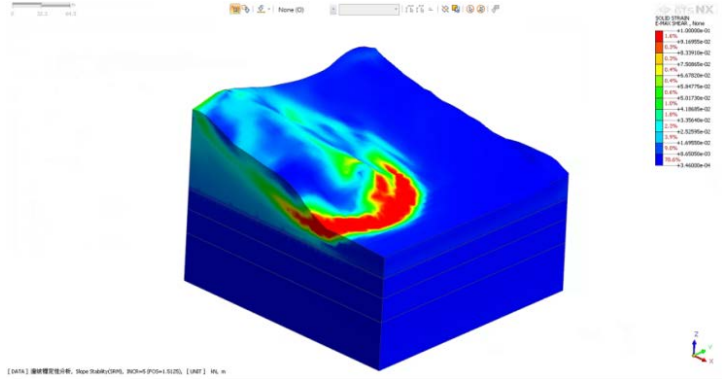

Maximum Shear Strain

GTS NX-降水井模擬

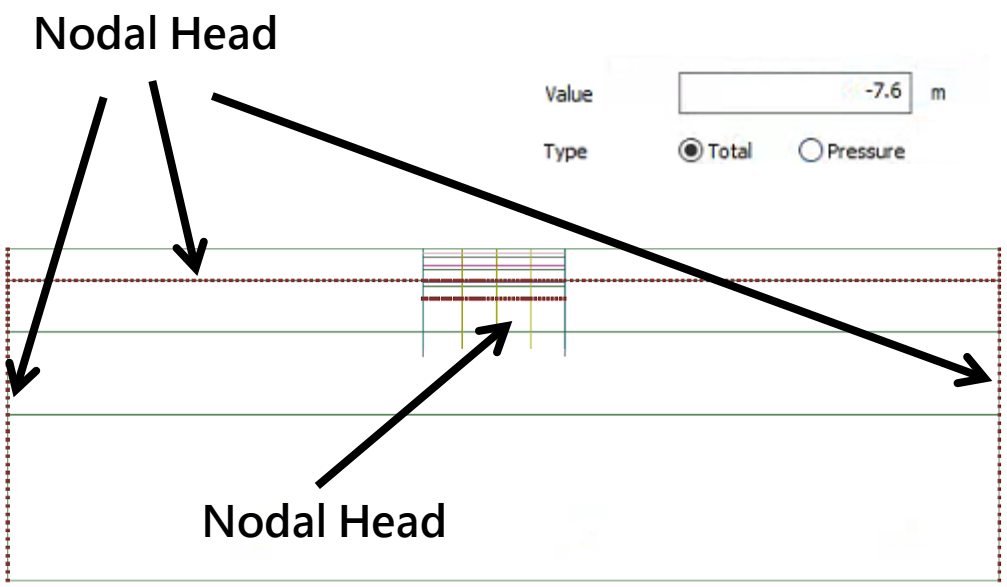

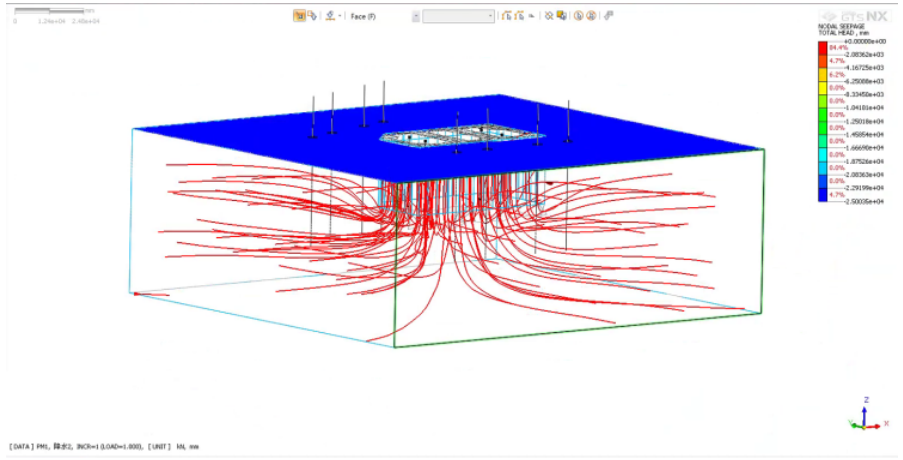

Total Head

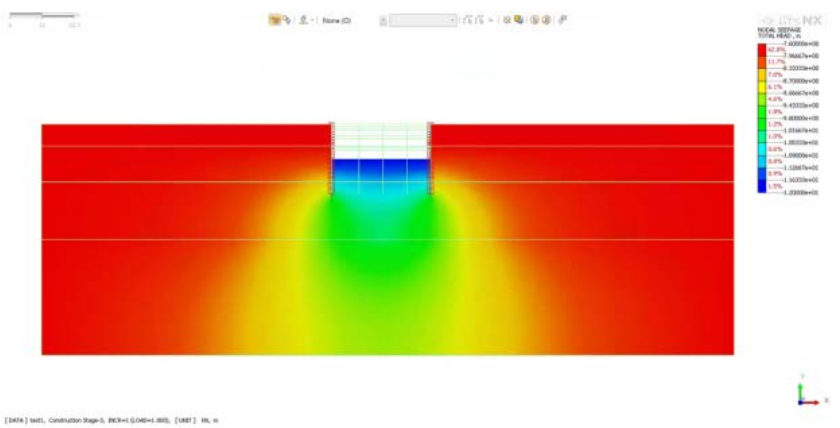

Flow Path

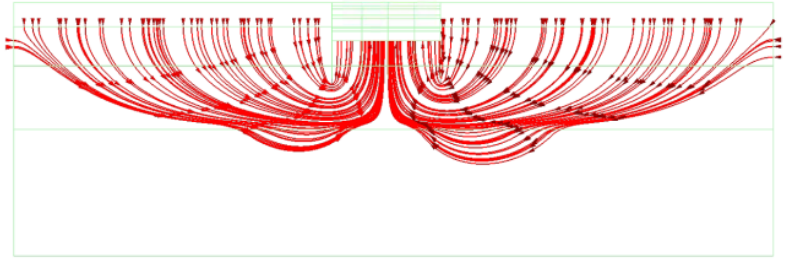

Seepage Flow Rate

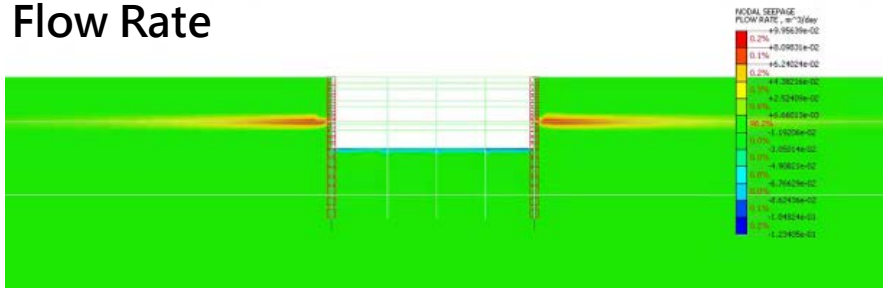

GTS NX-滲流應力耦合分析

Stage1.滲流分析

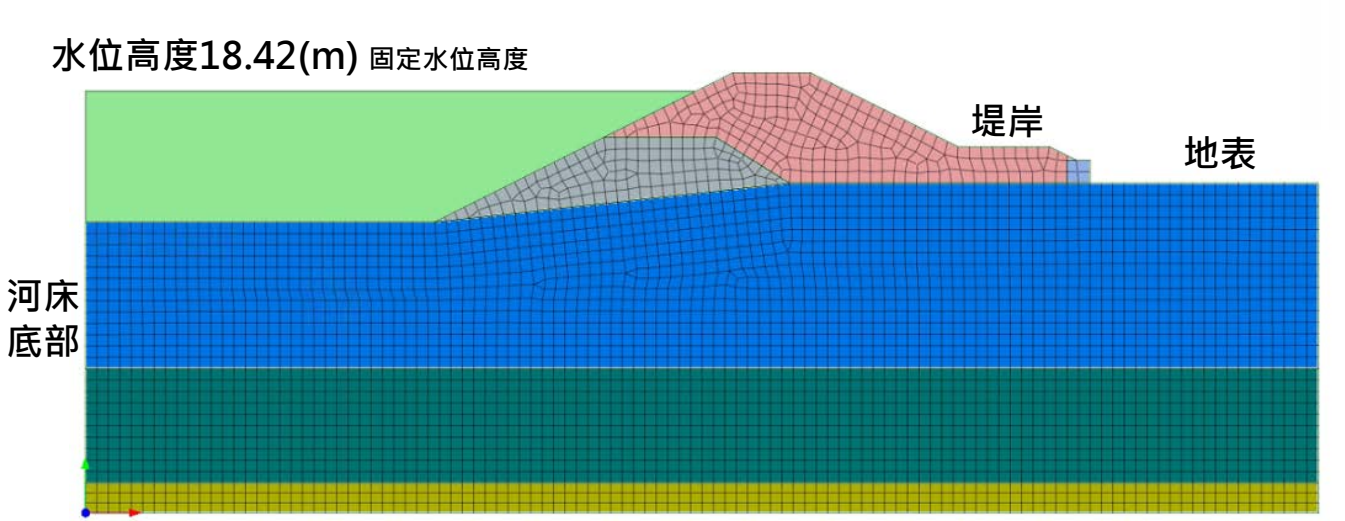

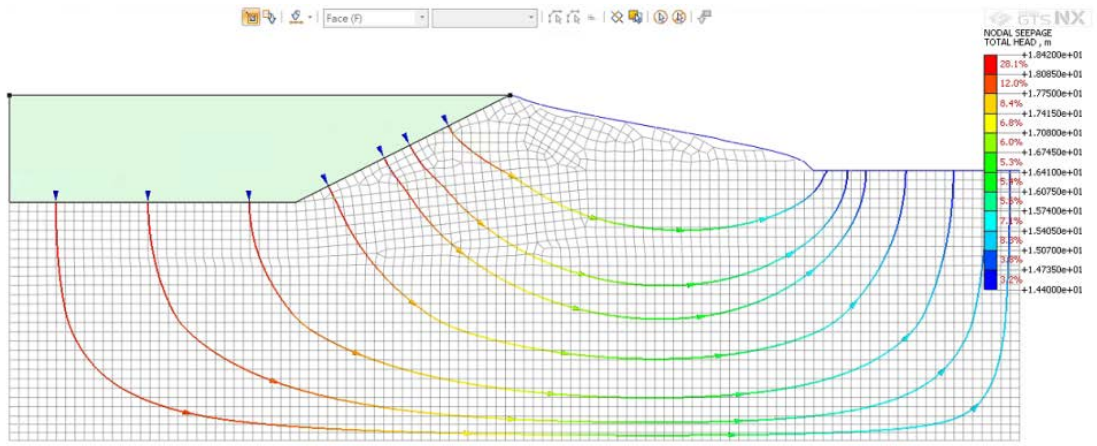

Stage2.應力耦合分析

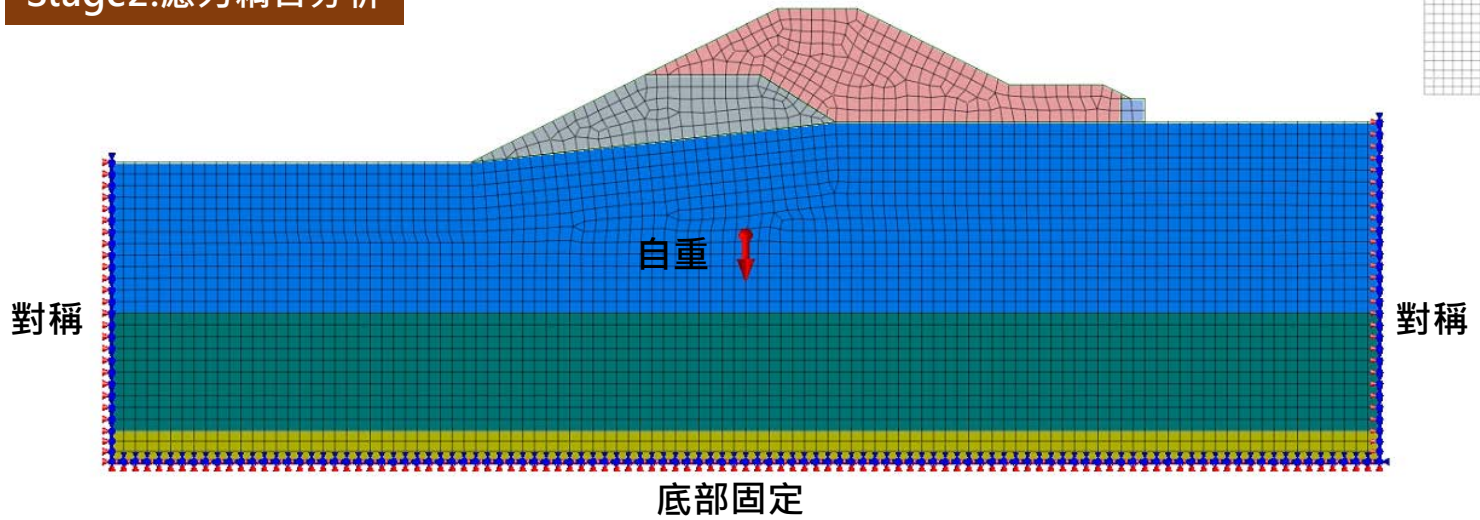

GTS NX-滲流應力耦合分析

Results
穩態滲流 INCR=1：滲流結果
應力 INCR=21：應力結果

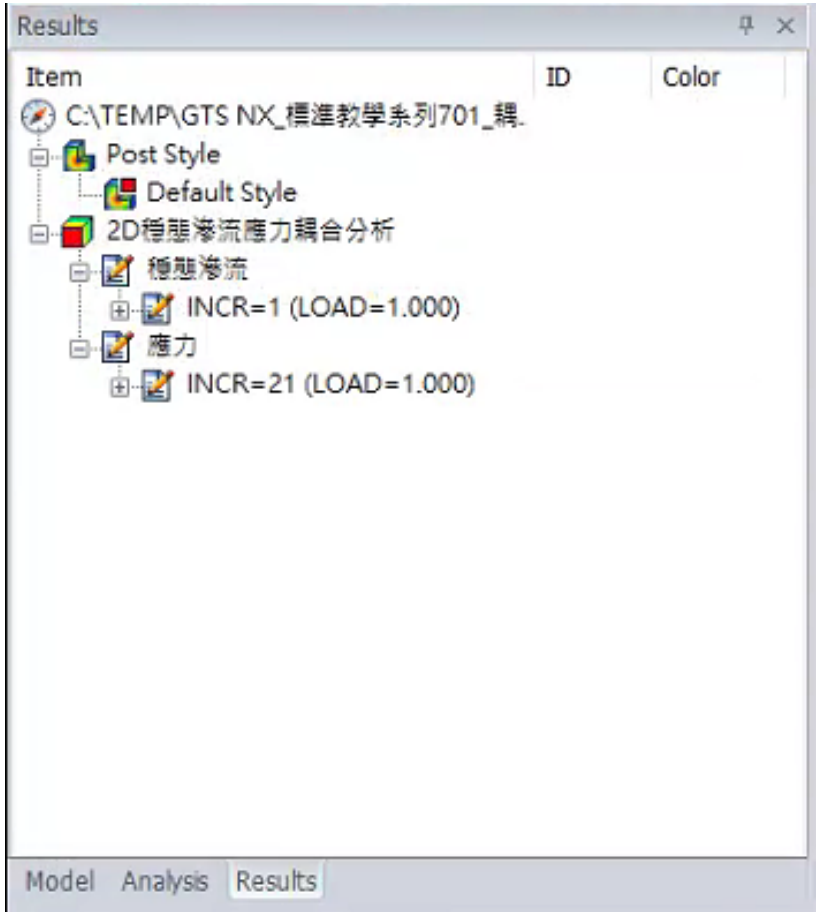

滲流結果

Total Head(m)

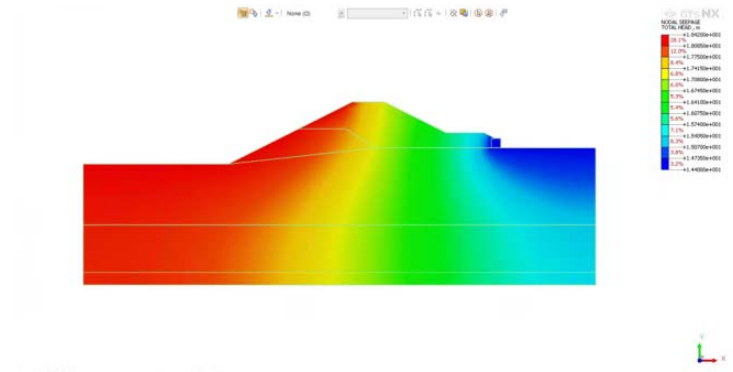

Pore Pressure(KN/m²)

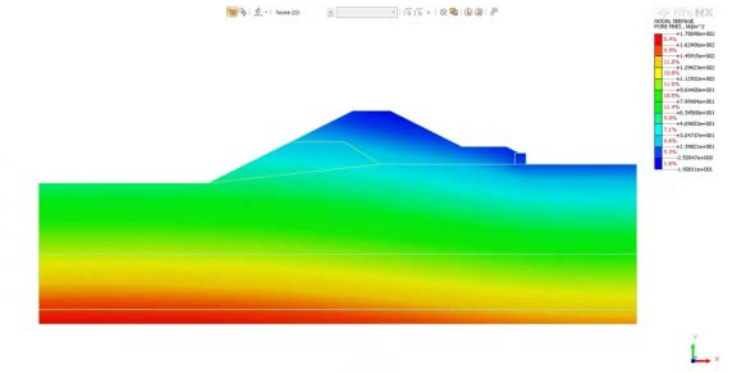

應力結果

Displacement Total(m)

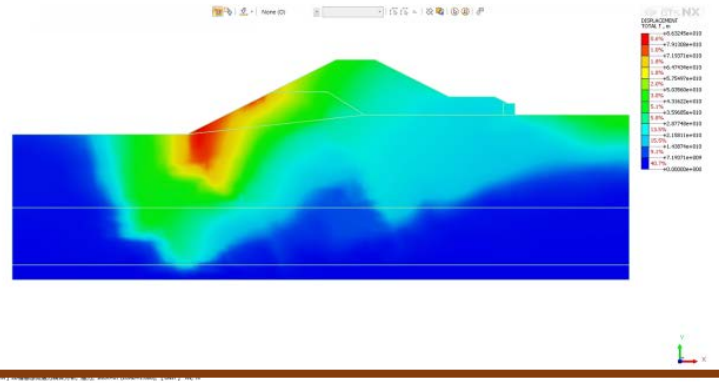

Pore Stress(KN/m²)

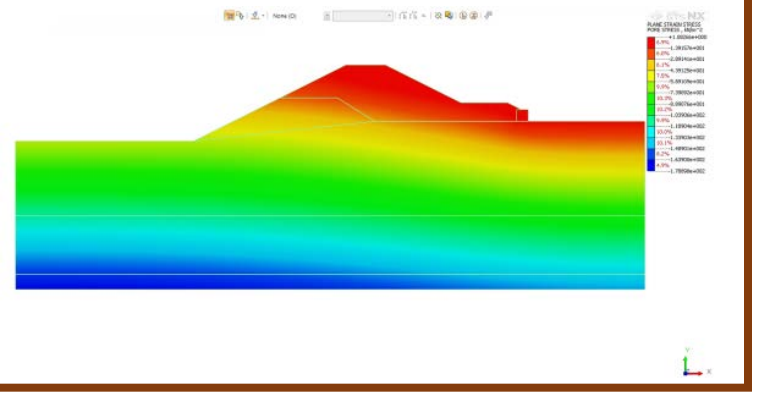

MIDAS
整合性介紹

MIDAS 整合性

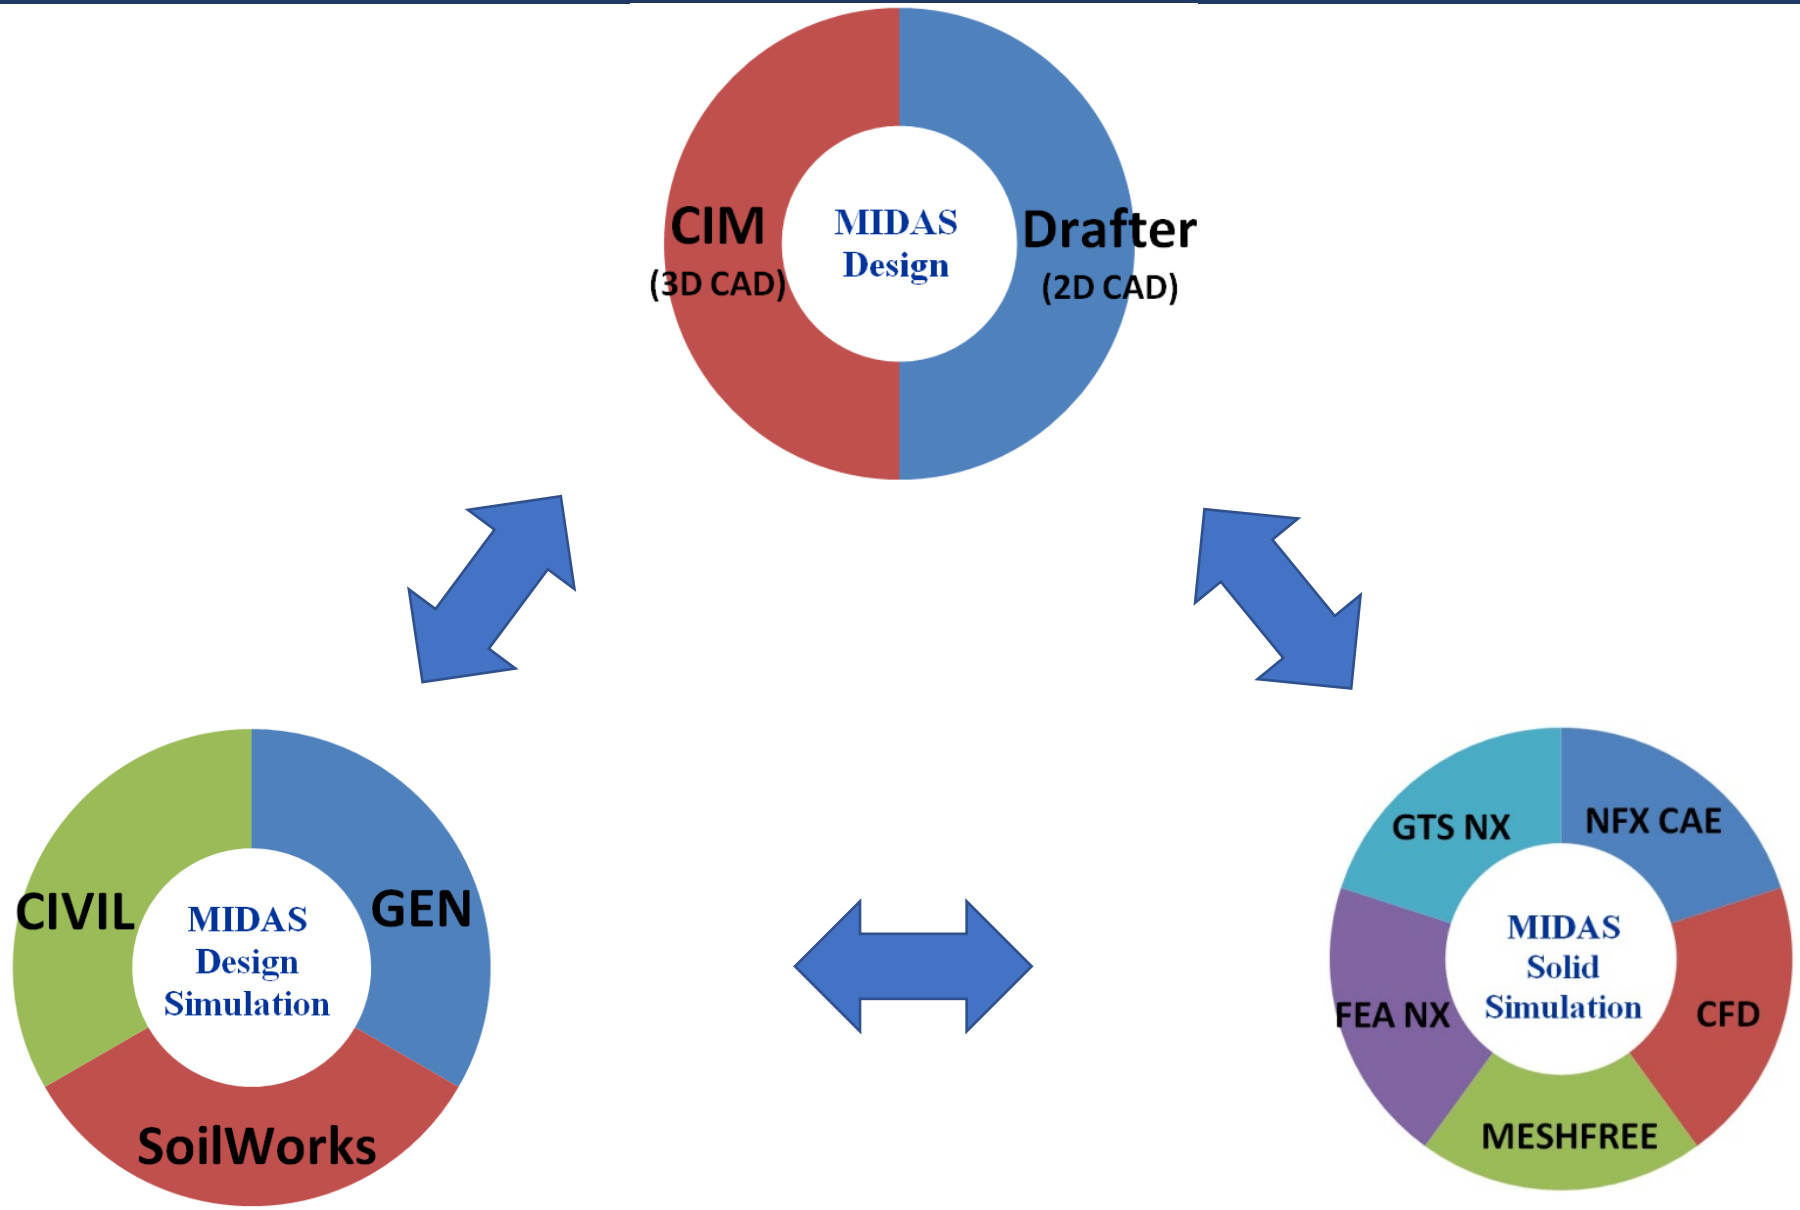
CIM
(3D CAD)
MIDAS
Design
Drafter
(2D CAD)
CIVIL
MIDAS
Design
Simulation
GEN
SoilWorks
GTS NX
NFX CAE
FEA NX
MIDAS
Solid
Simulation
CFD
MESHFREE

Solid Total Solution

土壤液化分析

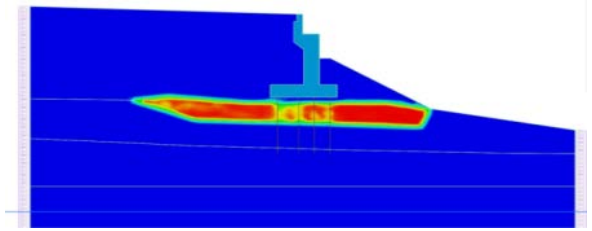

風機振動分析

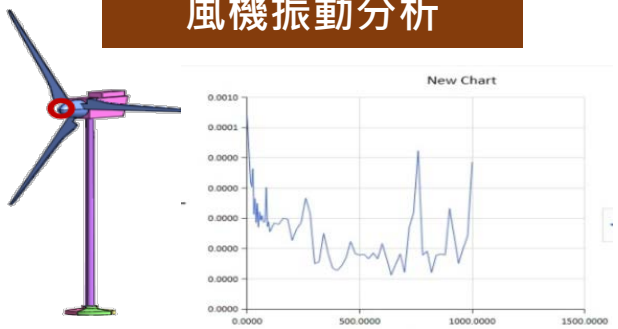

風機安裝施工階段分析

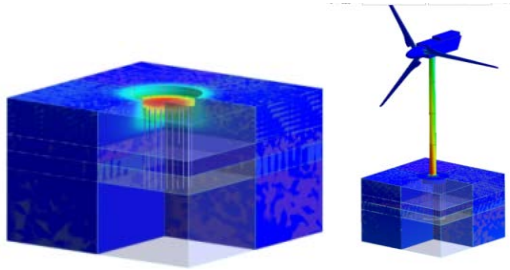

風機流固耦合分析

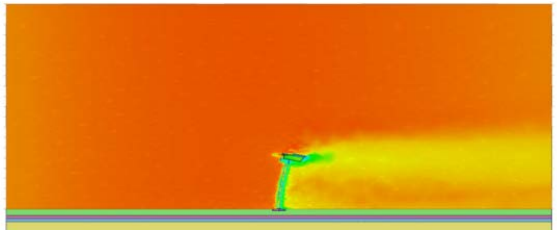

風機歷時分析

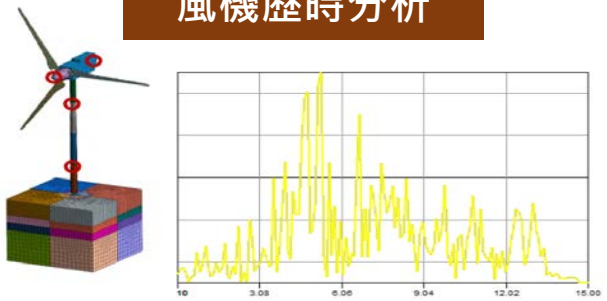

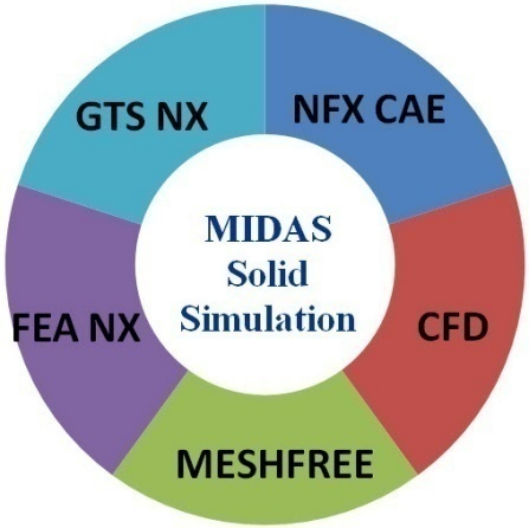

齒輪組分析

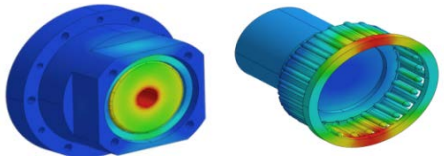

風機地形風場分析

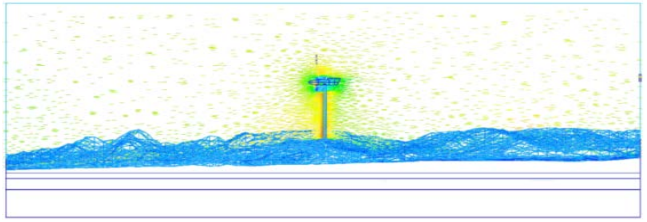

CIM+GTS 3D 模型整合

CIM-3D模型隨路線線形自動變更

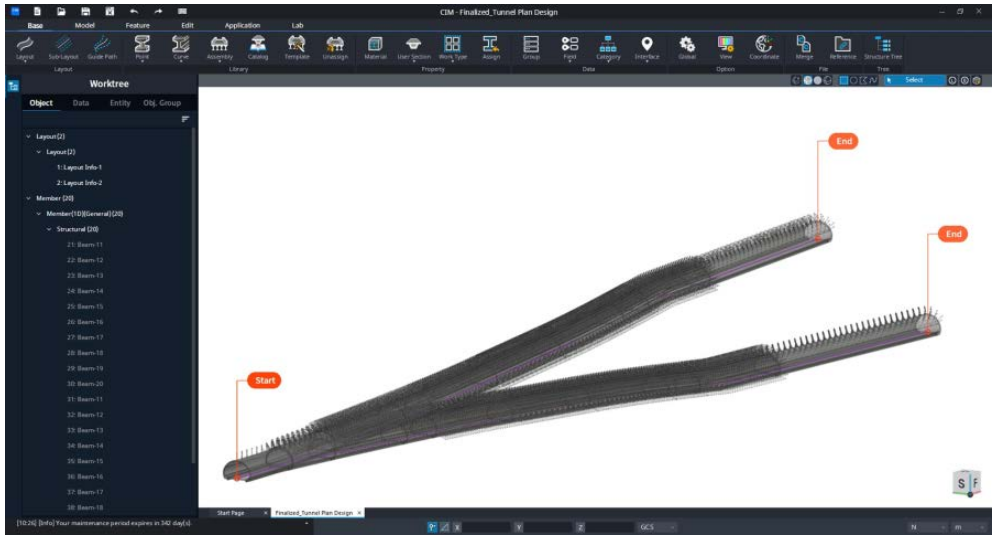

Bridge & Tunnel Wizard

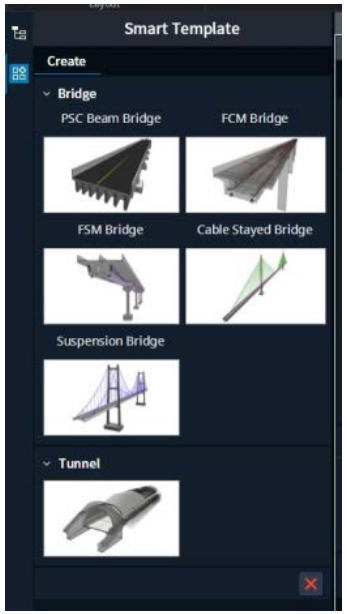

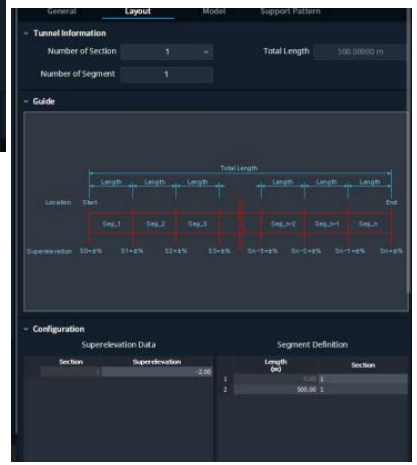

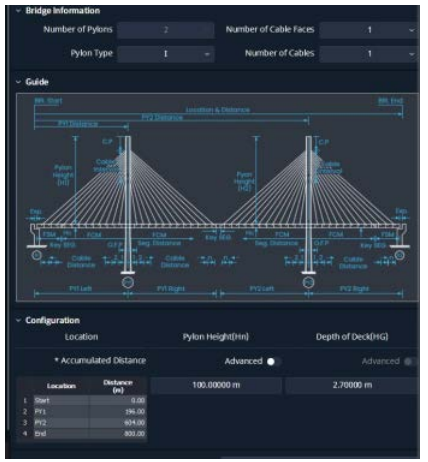

CIM+GTS 3D 模型整合

Tunnel

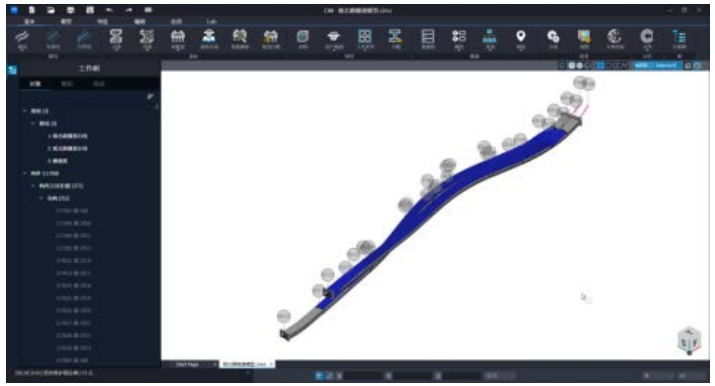

Bridge

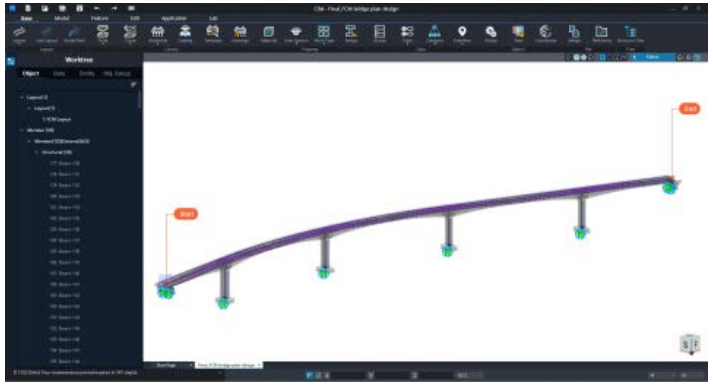

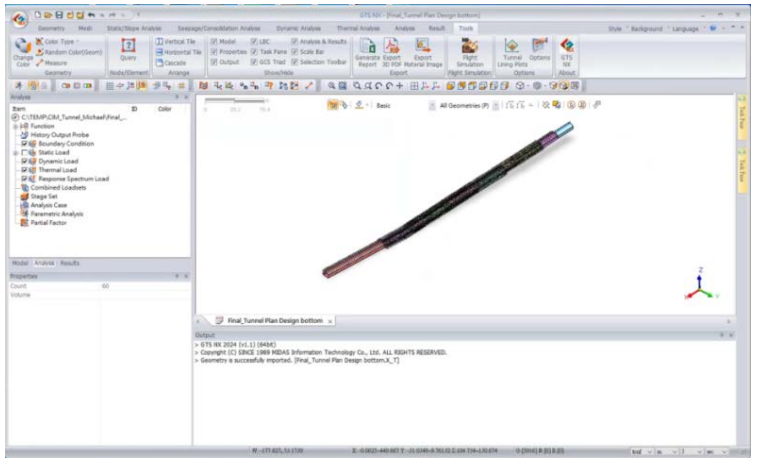

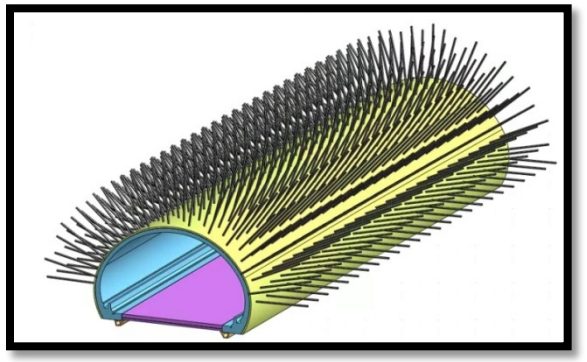

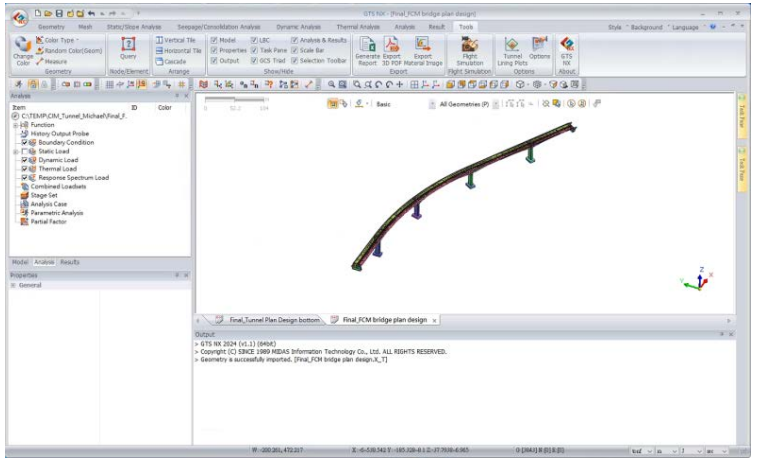

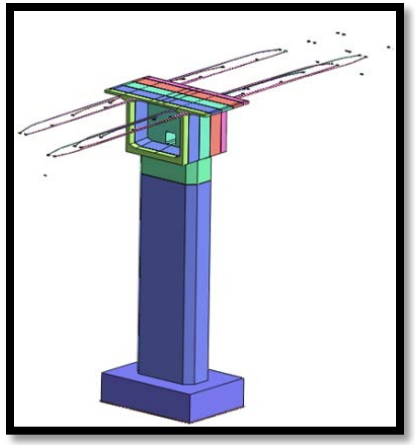

CIM&GTS NX
實體特徵直接轉換

GTS NX & Gen 結構互制分析

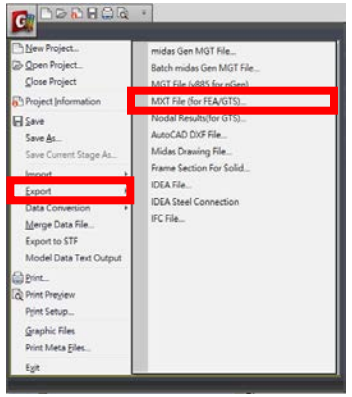

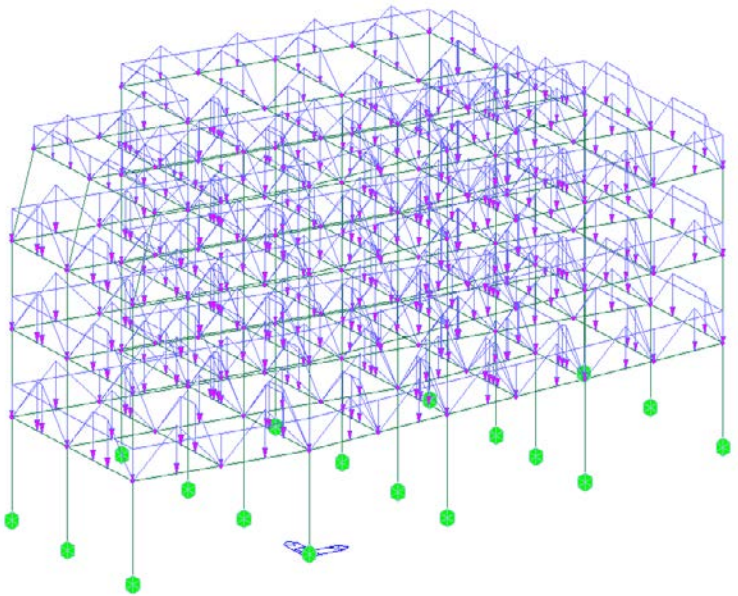

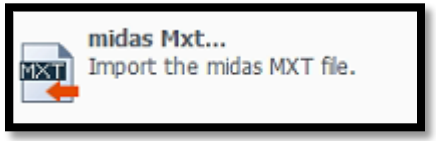



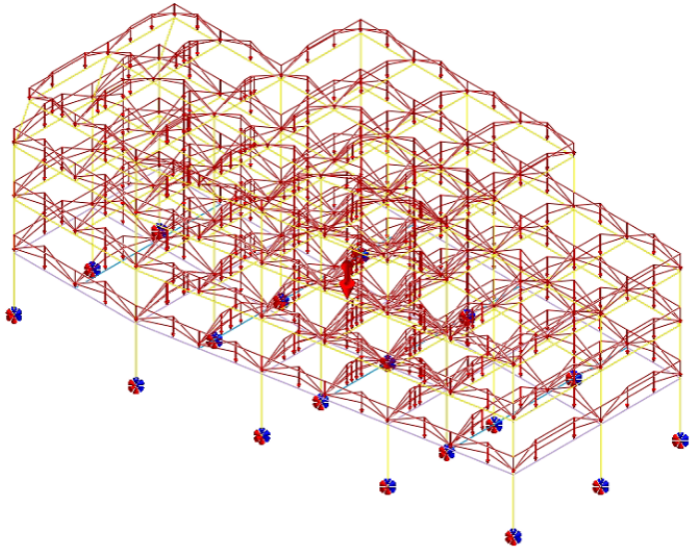

GTS NX & Gen 結構互制分析

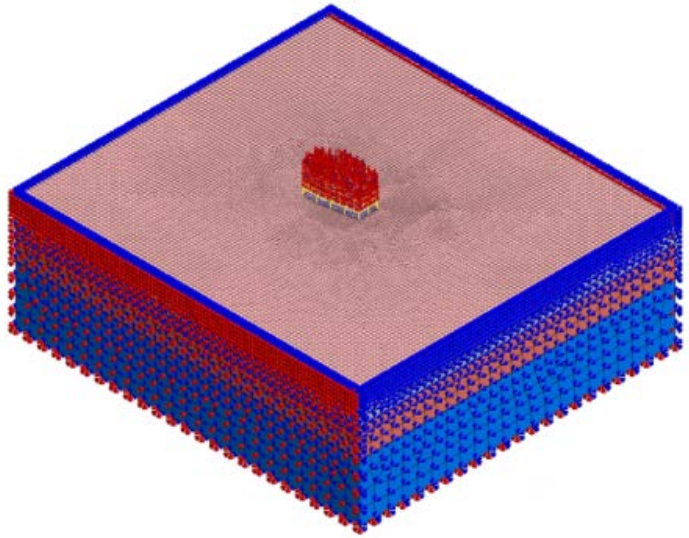

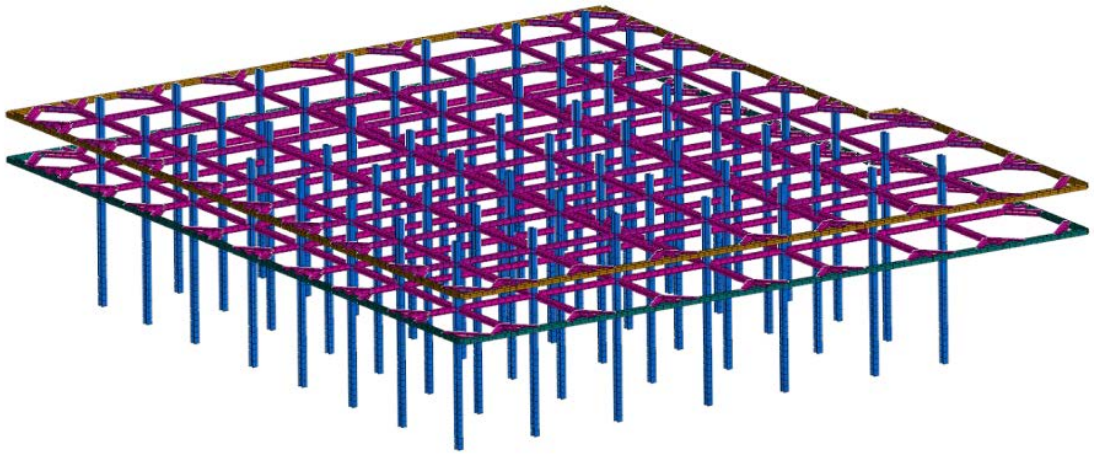

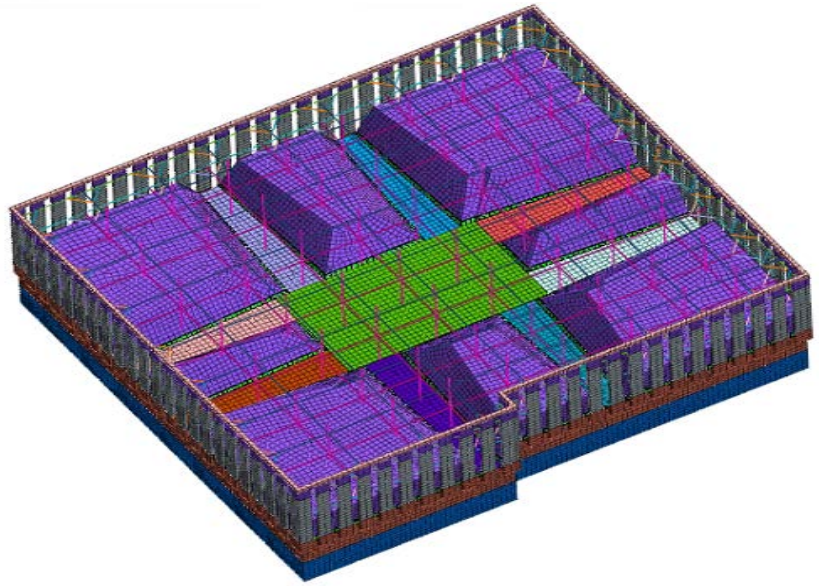

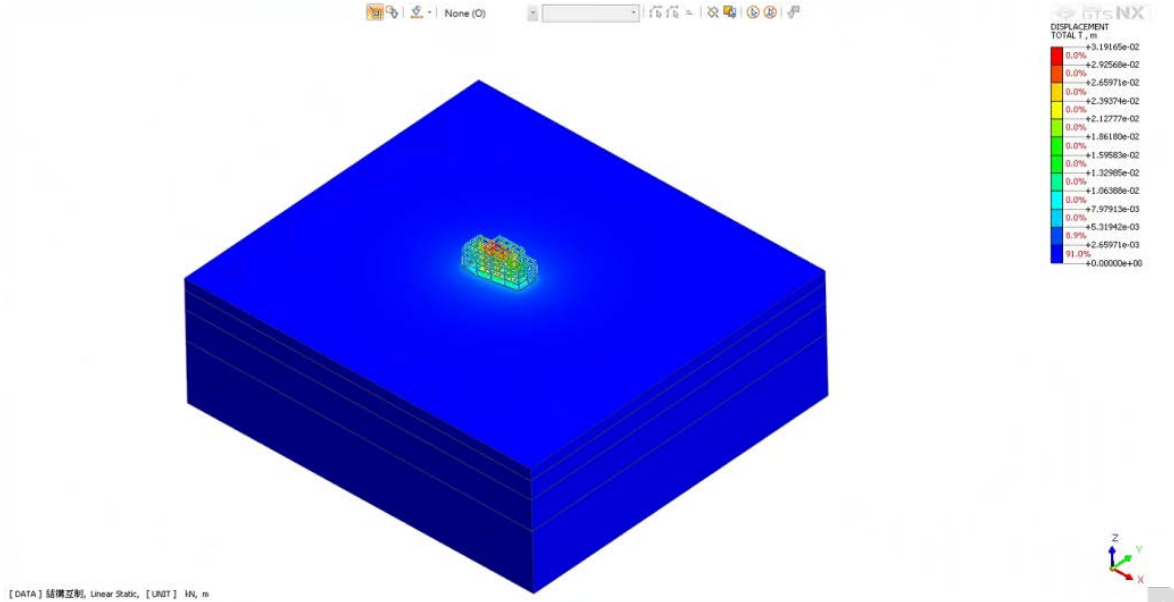

GTS NX+CIVIL無縫轉換

匯出MXT Files(*.mxt)檔案格式

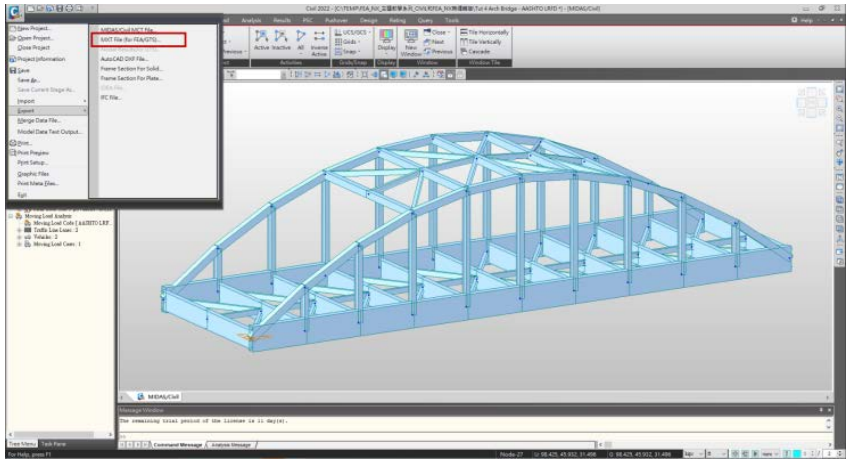

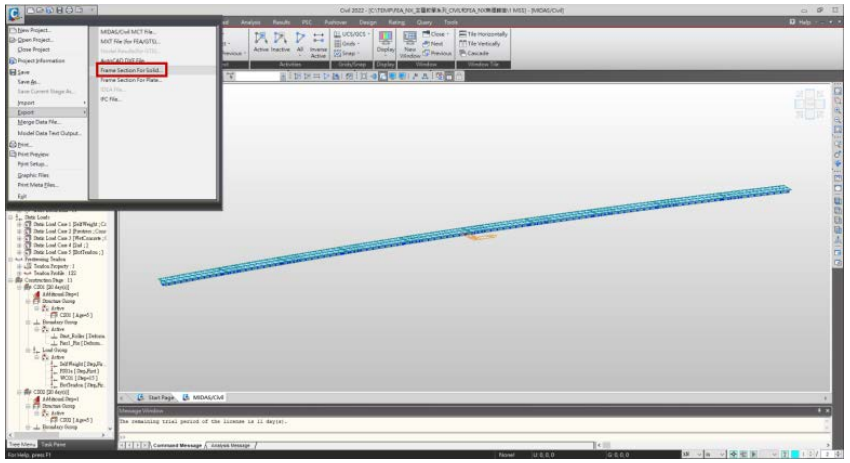

元素&特徵無縫轉換

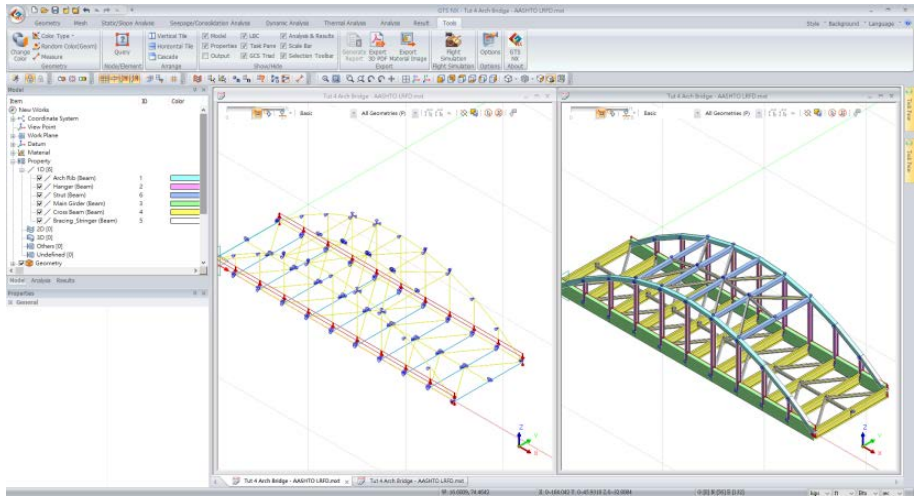

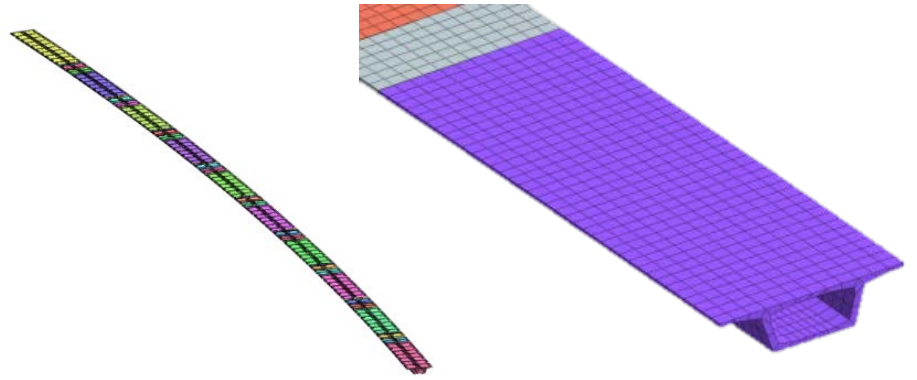

Thank you.